
G-WENDT







SINCE
1971

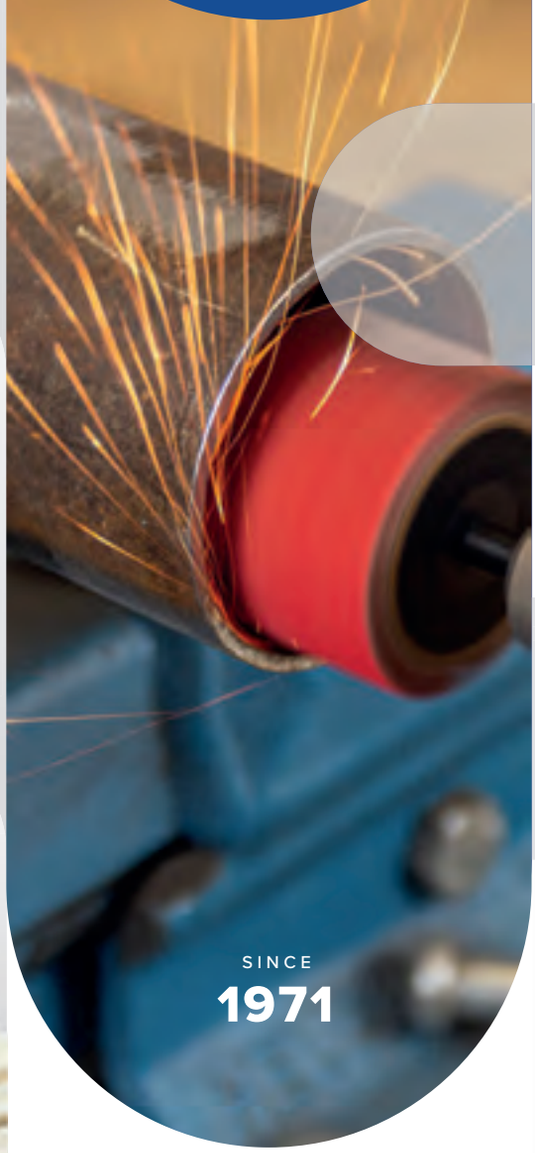







MAIN CATALOGUE



More on this at
g-wendt.com

WHAT DRIVES US

For more than 50 years, we have been supporting our customers in grinding, cutting, and refining surfaces.

Together, we develop unique solutions – both for industrial applications and the specialist trade.

Benefit from

› **flap discs, flap wheels, or our felt polishing tools – made in Germany.**

In addition to our commitment to quality and our philosophy of constantly optimising work processes, our top priority is a sustainable consulting approach – entirely in the best interest of our customers.



OUR CORE VALUES


› **Communication – open and direct**

› **Holistic consulting – before and after the sale**


› **The future begins today – product innovation since 1971**


› **Building bridges**

› **Creating added value**

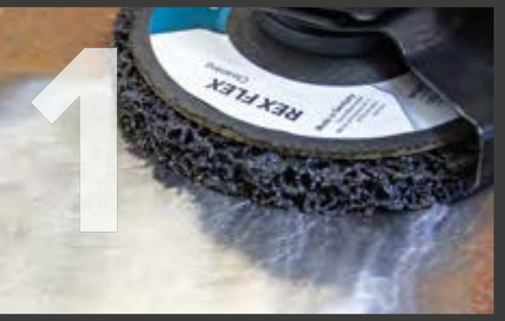



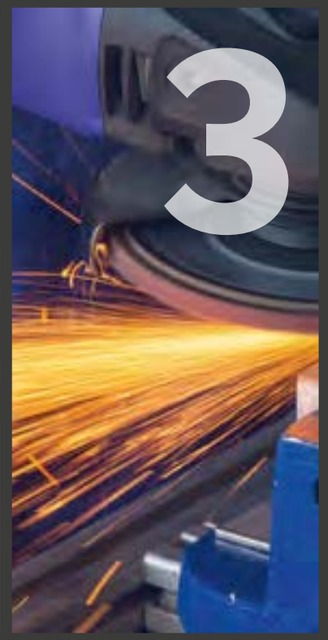

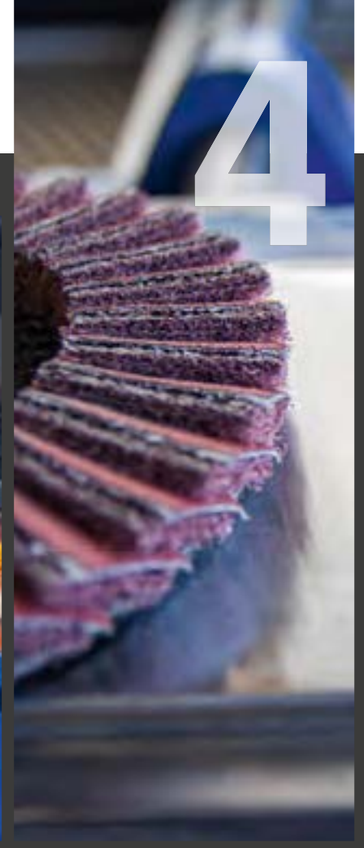











CONTENTS

WHAT DRIVES US		02
1.0	REX CLEANING	06
2.0	CUTTING & GRINDING	12
3.0	COATED ABRASIVES	22
4.0	NON-WOVEN AND INTERLEAVED ABRASIVES	56
5.0	PRE-POLISHING	80
6.0	FELT	POLISHING	92
7.0	G-WENDT POWER TOOLS	108
8.0	SOLID CARBIDE BURRS	110
9.0	SETS & ACCESSORIES	114

CONTENT







MATERIALS THAT CAN BE PROCESSED

Stainless steel (INOX) | Steel | Cast steel | Copper | Titanium
Titanium alloys | Bronze | Aluminium | Brass | Zinc

PROCESSING TASKS

For removing:
Scale | Corrosion | Tempering colours | Paint and coatings
Resins, epoxies, and surface residues

ADVANTAGES

- The open structure significantly reduces clogging.
- Low vibration reduces operator fatigue and offers a safer alternative to wire wheels.
- Reduced alteration of the workpiece geometry.

G-WENDT

REX CLEANING

REX cleaning products are designed for heavy-duty cleaning. Their unique open-web construction resists loading and runs cooler than traditional wire brushes and conventional abrasives. This makes them faster, safer, and more efficient to use.

REX FLEX CLEANING DISC ON FIBERGLASS BACKING

REX cleaning material bonded to a fiberglass backing for support and easy mounting on right angle tools Effectively removes paint, rust, tempering colours, adhesive residues, or scale.

The open structure significantly reduces clogging. Increased flexibility ensures enhanced working comfort. Very good stock removal and durability.

STAINLESS STEEL (INOX) | STEEL | CAST STEEL | COPPER TITANIUM TITANIUM ALLOYS | BRONZE ALUMINUM | BRASS | ZINC

ANGLE GRINDER



RF G27

DIMENSIONS (MM)		S-COARSE	RPM OPT.	RPM MAX.	
Ø A	Ø B				
115	22.23	245 401	6,000	11,000	5
125		245 403	5,600	9,800	

REX CLEANING DISCS

This product is particularly suitable for use with straight and pedestal grinders and removes rust, scale, or paint via peripheral grinding.

STAINLESS STEEL (INOX) | STEEL | CAST STEEL | COPPER TITANIUM TITANIUM ALLOYS | BRONZE ALUMINUM | BRASS | ZINC

STRAIGHT GRINDER **BENCH GRINDER**

A spindle is required for machine mounting.





RD

DIMENSIONS (MM)		S-COARSE	RPM OPT.	RPM MAX.	
Ø A	Ø B				
100	12	326 906	3,000	6,000	10
150	13	326 908	2,000	4,000	
200	12	326 910	1,500	3,000	

› ACCESSORIES

SHANK

STRAIGHT GRINDER



DESCRIPTION	DIMENSIONS (MM)		ARTICLE NUMBER	
	Ø A	B		
Spindle with special toothing for improved grip	6	40	326 993	1



REX CLEANING WHEELS


REX cleaning wheels are the first choice for the preparation and cleaning of heavily soiled, hard-to-reach surfaces.

Typical tasks:
- Removal of scale, corrosion, paint, coatings, or algae
- Elimination of tough layers, such as adhesives
- Spot repair

STAINLESS STEEL (INOX) | STEEL | CAST STEEL | COPPER TITANIUM TITANIUM ALLOYS | BRONZE ALUMINUM | BRASS | ZINC

STRAIGHT GRINDER

Our cleaning wheels are most effective at low speeds.





RS

DIMENSIONS (MM)			S-COARSE	RPM OPT.	RPM MAX.	
Ø A	B	Ø C				
55	13	6	187 510	6,000	12,100	10
75			187 520	4,000	8,600	

REX CLEANING ROLLS


Used for surface treatment. Removes rust and paint.

STAINLESS STEEL (INOX) | STEEL | CAST STEEL | COPPER TITANIUM TITANIUM ALLOYS | BRONZE ALUMINUM | BRASS | ZINC

SATIN FINISHING MACHINE



Cleaning rolls should always be used at a lower speed than abrasive cloth rolls. This increases service life and improves the surface finish.



RW

DIMENSIONS (MM)			S-COARSE	RPM OPT.	RPM MAX.	
Ø A	B	Ø C				
100	100	19	323 963	2,000	5,000	1
		M14	323 960			

CONTENTS

2.1 CUTTING DISCS 16

2.2 GRINDING DISCS 19



MATERIALS THAT CAN BE PROCESSED
Stainless steel (INOX) | Steel | Aluminium

PROCESSING TASKS
Clean and straight cutting | Weld seam processing
Deburring | Chamfering | Surface grinding

ADVANTAGES
- Selected and tested materials
- Solutions for a wide variety of material processing tasks
- Many dimensions and specifications available on request

G-WENDT

CUTTING & GRINDING

These tools provide ideal solutions for a wide range of processing tasks – for example, cutting sheets, solid material, or surface and weld seam processing. All products are manufactured according to the EN 12413 quality standard, and are certified accordingly. Available in various qualities, based on the application requirements.

INFORMATION ON TOOL LABELLING

WENDT quality lines

KÖLN Extremely high cutting performance with smooth running and soft cut.

NEW YORK Clean cut with minimal effort and good service life.

RIO The alternative for thin, burr-free cuts on steel and stainless steel for everyday use.

Distinctions

Cutting Disc

Grinding Disc



Article number

Safety symbols

Certifications

US safety standard

Dimensions

Shape

EU safety standard

ISO identification

A Aluminium oxide

C Silicon carbide

Z Zirconium

GRIT 4–24 = coarse, 30–60 = medium, 70–222 = fine

U Hardness (A = soft to Z = hard)

BF Fibre-reinforced resin bond with mesh or Resin bond with Glass Fiber reinforcement.

Max. operating speed (RPM)

Material suitability

Colour code

BLUE INOX/Stainless steel

YELLOW Steel

SILVER Aluminium

G-WENDT

CUTTING DISCS

KÖLN CUTTING DISCS FOR STAINLESS STEEL & STEEL

Outstanding cutting performance and excellent service life on steel and stainless steel (INOX).

Advantages:
- Fast and clean results
- Particularly comfortable handling
- Free from iron and sulphur

STAINLESS STEEL (INOX) | STEEL

ANGLE GRINDER

Ideal for cutting sheets, profiles, solid and round materials.



TYPE 41

TYPE 42

T1 | T2

TYPE	DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
	Ø A	B	Ø C				
41	115	1.0	22.23	A46U-BF	270 306	13,300	25
	125				270 307	12,250	
		1.5			270 312		
42	230	1.9			270 345	6,650	


NEW YORK CUTTING DISCS FOR STAINLESS STEEL & STEEL

These cutting discs guarantee strong cutting performance and long service life. Suitable without restriction for steel and stainless steel (INOX).

Thin cutting discs of the NEW YORK line are particularly low in vibration and also free from iron and sulphur.

STAINLESS STEEL (INOX) | STEEL

ANGLE GRINDER

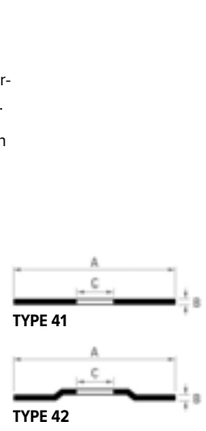

TYPE 41

TYPE 42

T1 | T2

TYPE	DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
	Ø A	B	Ø C				
41	115	1.0	22.23	AS60V-BF	270 206	13,300	25
	125				270 207	12,250	
		1.5		A46V-BF	270 212		
42	230	1.9		A30U-BF	270 245	6,650	

NEW YORK CUTTING DISCS FOR STEEL

The large diameters of our cutting discs are especially suitable for solid and round steel materials.

Advantages:
- Powerful performance
- Long service life

STEEL **BENCH GRINDER**

For use with stationary machines – not suitable for hand-held tools.



T1

TYPE	DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
	Ø A	B	Ø C				
41	300	2.8	25.4	A36R-BF	271 203	5,100	10
	350				271 205	4,400	

NEW YORK CUTTING DISCS FOR ALUMINIUM

Even on soft aluminium, these special cutting discs deliver high cutting performance and maximum service life.

Advantages:
- Fast results
- Maximum service life

ALUMINIUM **ANGLE GRINDER**





T1

TYPE	DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
	Ø A	B	Ø C				
41	125	1.5	22.23	C46P-BF	270 707	12,250	25



RIO CUTTING DISCS
FOR STAINLESS STEEL & STEEL

High cutting performance combined with very good service life.

Advantages:
- Suitable without restriction for steel and stainless steel (INOX)
- Thin cutting discs from the RIO line are particularly energy-efficient and therefore also suitable for cordless angle grinders

STAINLESS STEEL (INOX) | STEEL

ANGLE GRINDER

Ideal for cutting sheets, profiles, and solid materials.





T1

TYPE	DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
	Ø A	B	Ø C				
41	115	1.0	22.23	A60Q-BF	270 406	13,300	50
	125	1.0			270 407	12,250	
		1.5			270 412		
	230	1.9		A46S-BF	270 415	6,650	25

2.2

GRINDING DISCS

KÖLN ELASTIC GRINDING DISCS
FOR STAINLESS STEEL & STEEL

Made with a specially formulated elastic bond creates less vibration than conventional grinding discs. It is significantly smoother and more comfortable for the operator. With excellent stock removal and high grinding performance.

Advantages:
- Suitable for both stainless steel (INOX) and aluminium
- Significantly reduced vibration, noise, and dust generation
- High working comfort
- Aggressive stock removal

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM

ANGLE GRINDER

No backing pad required.





S7

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
125	5	22.23	PA33P-BF	270 678	12,250	7



NEW YORK GRINDING DISCS
FOR STAINLESS STEEL & STEEL

Aggressive material removal and excellent service life on both steel and stainless steel (INOX).

Advantages:
- Fast results
- Very long service life
- Free from iron and sulphur

STAINLESS STEEL (INOX) | STEEL **ANGLE GRINDER**

Ideal for weld seam processing, deburring, chamfering or surface grinding.





S7

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
125	6.5	22.23	A30N-BF	270 278	12,250	10



NEW YORK GRINDING DISCS
FOR STEEL

High stock removal combined with good service life on steel. This tool is also suitable for low-power angle grinders, as excellent removal results are achieved even with low contact pressure.

Advantages:
- Fast on steel
- Free from iron and sulphur

STEEL **ANGLE GRINDER**





S7

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
125	6.5	22.23	A30P-BF	270 178	12,250	10





S7

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
125	6.5	22.23	A24P-BF	270 778	12,250	5

CONTENTS

3.1	FLAP DISCS	**25**
3.2	FOLDED FLAP DISCS I RESIN FIBER DISCS	**34**
3.3	QUICK CHANGE DISCS	**36**
3.4	FLAP WHEELS I CARTRIDGE ROLLS I CROSS BUFFS	**38**
3.5	UNMOUNTED FLAP WHEELS	**46**
3.6	FLAP BANDS I SPIRAL BANDS	**50**
3.7	FLAP ROLLS	**52**
3.8	TWINPOWER	**54**









MATERIALS THAT CAN BE PROCESSED
Stainless steel (INOX) and alloys I Steel I Aluminium I Titanium I Brass
Copper I Zinc I Nickel I Plastics

APPLICATIONS
Weld seam processing I Material removal I Surface preparation
Coarse grinding I Matte finishing I Texturing I Chamfering
Surface finishing Deburring I Edge finishing

ADVANTAGES
- Outstanding performance and fast work progress
- Impressive service life
- Highest quality and safety standards in manufacturing

G-WENDT

COATED ABRASIVES

Our coated abrasives standout due to their broad variety and are suitable for processing a wide range of materials and workpiece geometries. Our product range meets all requirements in areas such as repair, maintenance or weld seam processing.

GENERAL INFORMATION ON THE PRODUCTS IN THIS CHAPTER

Our wide range includes a variety of shapes, backing plate materials and grit sizes.

PRODUCT LINES

KÖLN

Maximum stock removal and longest service life.

NEW YORK

For top performance and productivity.

RIO

Good stock removal on low-powered machines with low contact pressure.

SHAPES



FLAT (TYPE 28)

Ideal for blending and smooth grind finishing.



CONICAL 8° (TYPE 27)

Slightly convex design.



CONICAL 15° (TYPE 29)

Especially suitable for aggressive stock removal.

BACKING PADS MATERIALS

FIBREGLASS

The most cost effective option for strength and support.

ALUMINIUM

Ideal for applications with high contact pressure and rapid stock removal. The aluminium also conducts heat, reducing the risk of discolouration on the workpiece.

PLASTIC

High-strength and impact-resistant while being more economical than aluminium.

WENDT was one of the first manufacturers of Flap Discs!

KÖLN HITEC ZIRCONIA
ZIRCONIA

This flap disc is characterised by a particularly high density of flaps and provides a cushioning effect, especially during finishing. The high material content ensures extremely long service life.

STEEL | STAINLESS STEEL (INOX)

ANGLE GRINDER

For more aggressive stock removal, we recommend standard zirconia or ceramic flap discs.







GH29 (CONICAL 15°)

DIMENSIONS (MM)		ZIRCONIA				RPM MAX.	
Ø A	Ø B	X40	X60	X80	X120		
115	22.23	236 112	236 113	236 114	236 116	10,500	10
125		236 132	236 133	236 134	236 136	9,600	



KÖLN POWERFLEX
CERAMIC

This flap disc is ideal for hard-to-machine materials thanks to its aggressive ceramic grain.

Ideal for:
- Weld seam processing
- Deburring
- Chamfering
- Surface grinding
- Very low vibration and time-saving
- Lower thermal load than conventional flap discs
- Self-sharpening ceramic grain ensures impressive results
- Easy handling and high stock removal

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

ANGLE GRINDER

Best results with high-performance angle grinders.



G19 (CONICAL 15°)

DIMENSIONS (MM)		CERAMIC			RPM MAX.	
Ø A	Ø B	K40	K60	K80		
115	22.23	229 412	229 413	229 414	13,300	10
125		229 432	229 433	229 434	12,250	

KÖLN FLEXIBLE FLAP DISC
CERAMIC

Excellent stock removal. Comfortable and safe operation.

Advantages:
- Reduced grinding time
- Improved grinding feel

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

ANGLE GRINDER

Other dimensions and a zirconia version available on request.



G28 FLEX (FLAT)

DIMENSIONS (MM)		CERAMIC		RPM MAX.	
Ø A	Ø B	K40	K60		
125	22.23	228 332	228 333	12,250	10

NEW YORK POWERFLEX
ZIRCONIA

These flap discs impress with aggressive material removal and excellent service life. One of the best tools for both steel and stainless steel (INOX).

Ideal for:
- Weld seam processing
- Deburring
- Chamfering
- Surface grinding
- Consistent aggressiveness throughout its lifetime
- Outstanding service life and removal performance
- Very low vibration
- Maximum efficiency

STEEL | STAINLESS STEEL (INOX)


ANGLE GRINDER





G29 (CONICAL 15°)

DIMENSIONS (MM)		ZIRCONIA					RPM MAX.	
Ø A	Ø B	X36	X40	X60	X80	X120		
100	16	229 101	229 102	229 103	229 104	229 106	15,300	10
115	22.23	229 111	229 112	229 113	229 114	229 116	13,300	
125		229 131	229 132	229 133	229 134	229 136	12,250	
178		229 141	229 142	229 143	229 144	229 146	8,500	



G28 (FLAT)

DIMENSIONS (MM)		ZIRCONIA					RPM MAX.	
Ø A	Ø B	X36	X40	X60	X80	X120		
100	16	228 101	228 102	228 103	228 104	228 106	15,300	10
115	22.23	228 111	228 112	228 113	228 114	228 116	13,300	
125		228 131	228 132	228 133	228 134	228 136	12,250	
178		228 141	228 142	228 143	228 144	228 146	8,500	



G27 (CONICAL 8°)

DIMENSIONS (MM)		ZIRCONIA					RPM MAX.	
Ø A	Ø B	X36	X40	X60	X80	X120		
100	16	227 101	227 102	227 103	227 104	227 106	15,300	10
115	22.23	227 111	227 112	227 113	227 114	227 116	13,300	
125		227 131	227 132	227 133	227 134	227 136	12,250	
178		227 141	227 142	227 143	227 144	227 146	8,500	

NEW YORK POWERFLEX
ALUMINIUM OXIDE

Thanks to its high material removal and good service life, this flap disc ensures increased efficiency.

Ideal for:
- Weld seam processing
- Surface grinding

STEEL **ANGLE GRINDER**



G29 (CONICAL 15°)

DIMENSIONS (MM)		ALUMINIUM OXIDE			RPM MAX.	
Ø A	Ø B	N40	N60	N80		
100	16	229 002	229 003	229 004	15,300	10
115	22.23	229 012	229 013	229 014	13,300	
125		229 032	229 033	229 034	12,250	
178		229 042	229 043	229 044	8,500	



RIO POWERFLEX
ZIRCONIA

These flap discs offer good service life and high material removal performance.

Ideal for:
- Weld seam processing
- Deburring
- Chamfering
- Surface grinding

STEEL | STAINLESS STEEL (INOX) **ANGLE GRINDER**








G19 (CONICAL 15°)

DIMENSIONS (MM)		ZIRCONIA			RPM MAX.	
Ø A	Ø B	E40	E60	E80		
100	16	229 702	229 703	229 704	15,300	10
115	22.23	229 712	229 713	229 714	13,300	
125		229 732	229 733	229 734	12,250	
150		229 792	229 793	229 794	10,100	
178		229 742	229 743	229 744	8,500	



G18 (FLAT)

DIMENSIONS (MM)		ZIRCONIA			RPM MAX.	
Ø A	Ø B	E40	E60	E80		
115	22.23	228 712	228 713	228 714	13,300	10
125		228 732	228 733	228 734	12,250	
178		228 742	228 743	228 744	8,500	

NEW YORK POWERFLEX
ZIRCONIA
REDUCED FIBREGLASS BACKING

Ideal for working on edges, corners, and hard-to-reach areas.

STEEL | STAINLESS STEEL (INOX)

ANGLE GRINDER






G17 (CONICAL 8°)

DIMENSIONS (MM)		ZIRCONIA				RPM MAX.	
Ø A	Ø B	R40	R60	R80	R120		
115	22.23	240 812	240 813	240 814	240 816	13,300	10
125		240 832	240 833	240 834	240 836	12,250	

KÖLN POWERFLEX
FOR ALUMINIUM

This flap disc delivers impressively cool grinding on poorly heat-conductive materials – especially aluminium.
Lower thermal load than conventional flap discs.

ALUMINIUM **ANGLE GRINDER**





G29 (CONICAL 15°)


DIMENSIONS (MM)		ARTICLE NUMBER		RPM MAX.	
Ø A	Ø B	L40	L60		
115	22.23	229 212	229 213	13,300	10
125		229 232	229 233	12,250	

NEW YORK POWERFLEX
ZIRCONIA
ALUMINUM BACKING

The aluminium backing enables high contact pressure.

STEEL | STAINLESS STEEL (INOX)

ANGLE GRINDER





A29 (CONICAL 15°)


DIMENSIONS (MM)		GRIT				RPM MAX.	
Ø A	Ø B	X40	X60	X80	X120		
115	22.23	244 112	244 113	244 114	244 116	13,300	10
125		244 132	244 133	244 134	244 136	12,250	
178		244 142	244 143	244 144	244 146	8,500	

RIO POWERFLEX
ZIRCONIA
PLASTIC BACKING

Versatile flap discs for universal use.

STEEL | STAINLESS STEEL (INOX)

ANGLE GRINDER





K11 (FLAT)

DIMENSIONS (MM)		ZIRCONIA				RPM MAX.	
Ø A	Ø B	E40	E60	E80	E120		
115	22.23	230 712	230 713	230 714	230 716	13,300	10
178		230 742	230 743	230 744	230 746	8,500	

KÖLN FLEXIBLE MINI POWERFLEX
CERAMIC

These tools are a highly flexible version of our mini flap discs. The standing flaps and extended flap projection enable a smooth and particularly even grind. Additionally to standard models, due to the flexible design. The quick-change system consists of plastic external thread (R-Type).

STEEL | STAINLESS STEEL (INOX)

MINI ANGLE GRINDER **STRAIGHT GRINDER**

Available on request in zirconia or other dimensions.



K1 FLEX

DIMENSIONS (MM)	FASTENER	CERAMIC		RPM MAX.	
Ø A		K40	K60		
50	R-Type	230 458	230 459	19,100	10

KÖLN MINI POWERFLEX
CERAMIC
PLASTIC BACKING

Excellent stock removal thanks to aggressive ceramic grain, especially on steel and stainless steel (INOX). The quick-change system consists of plastic external thread (R-Type).

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

MINI ANGLE GRINDER **STRAIGHT GRINDER**



K1 (FLAT)

DIMENSIONS (MM)	FASTENER	CERAMIC				RPM MAX.	
Ø A		K40	K60	K80	K120		
50	R-Type	230 488	230 489	230 490	230 491	19,100	10
75		230 495	230 496	230 497	230 498	12,700	

KÖLN MINI POWERFLEX
ZIRCONIA

Less aggressive than the ceramic version, but still offers excellent stock removal and durability, especially on steel and stainless steel (INOX).

The quick-change systems, consisting of plastic external thread (R-Type) or internal thread, enable quick and secure tool changes.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

MINI ANGLE GRINDER **STRAIGHT GRINDER**

R-TYPE

INTERNAL THREAD



K1 (FLAT)

DIMENSIONS (MM)	FASTENER	ZIRCONIA				RPM MAX.	
Ø A		V40	V60	V80	V120		
50	Internal thread	230 672	230 673	230 674	230 676	19,100	10
	R-Type	230 688	230 689	230 690	230 691		
75	Internal thread	230 682	230 683	230 684	230 686	12,700	
	R-Type	230 695	230 696	230 697	230 698		

› ACCESSORIES



SHANK FOR MINI POWERFLEX WITH INTERNAL THREAD

DIMENSIONS (MM)		ARTICLE NUMBER	
Ø A	B		
6	40	230 998	1



QUICK CHANGE HOLDER FOR EXTERNAL THREAD.

DIMENSIONS (MM)		FASTENER	ARTICLE NUMBER	
Ø A	Ø B			
50	6	R-Type	263 170	1
75			263 180	
	M14		263 185	

FOLDED FLAP DISCS M14
ZIRCONIA

These folded flap discs enable particularly aggressive stock removal on a wide range of materials. Threaded M14 arbor for easy installation.

STEEL | STAINLESS STEEL (INOX) **ANGLE GRINDER**



Also available in aluminium oxide upon request.



FS M14

DIMENSIONS (MM)		ZIRCONIA			RPM MAX.	
Ø A	Ø B	R40	R60	R80		
115	M14	245 785	245 786	245 787	13,300	10
125		245 790	245 791	245 792	12,250	

FOLDED FLAP DISCS
ALUMINIUM OXIDE

Also available in aluminium oxide upon request.

STEEL

BENCH GRINDER **FILLET WELD ATTACHMENT**





FS

DIMENSIONS (MM)		ALUMINIUM OXIDE			RPM MAX.	
Ø A	Ø B	A80	A120	A180		
160	10	323 602	323 604	323 606	5,500	1
	14	323 612	323 614	323 616		
	25	323 632	323 634	323 636		
200	14	323 642	323 644	323 646	4,500	
400	45	323 682	323 684	323 686	2,200	

FIBRE DISCS
ZIRCONIA

Depending on the version, these tools are suitable for all grinding tasks in industrial and craft applications. Our fibre discs are suitable for all angle grinders and cordless angle grinders.

The zirconia alumina version is particularly suitable for coarse grinding tasks and offers both long service life and high stock removal.

STEEL | STAINLESS STEEL (INOX) **ANGLE GRINDER**



Fibre discs with ceramic grain available on request.



RFD

DIMENSIONS (MM)		ZIRCONIA				RPM MAX.	
Ø A	Ø B	Z36	Z60	Z80	Z120		
115	22.23	264 412	264 415	264 416	264 418	13,300	50
125		264 422	264 425	264 426	264 428	12,250	
180		264 442	264 445	264 446	264 448	8,500	

› ACCESSORIES

BACKING PAD
FOR FIBRE DISCS





BP

DIMENSIONS (MM)		SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	Ø C				
115	M14	Standard (soft)	263 225	13,300	1
		Heavy Duty (hard)	263 244		
125		Standard (soft)	263 229	12,250	
		Heavy Duty (hard)	263 246		
180		Standard (soft)	263 235	8,500	
		Heavy Duty (hard)	263 248		

QUICK CHANGE DISCS

QUICK CHANGE DISCS CERAMIC WITH GRINDING-ACTIVE ADDITIVES

Aggressive grinding and maximum material removal on hard materials. The self-sharpening ceramic grain ensures top performance throughout the entire service life.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

MINI ANGLE GRINDER **STRAIGHT GRINDER**



QC

DIMENSIONS (MM)	FASTENER	CERAMIC				RPM MAX.	
Ø A		K36	K60	K80	K120		
50	R-Type	262 511	262 514	262 515	262 517	25,000	100
75		262 521	262 524	262 525	262 527	20,000	50
50	S-Type	262 561	262 564	262 565	262 567	25,000	100
75		262 571	262 574	262 575	262 577	20,000	50

QUICK CHANGE DISCS ZIRCON+ WITH GRINDING-ACTIVE ADDITIVES

These tools are especially suitable for coarse grinding and provide high stock removal and long service life. In addition, grinding-active additives prevent clogging and enable cooler grinding.

STEEL | STAINLESS STEEL (INOX)

MINI ANGLE GRINDER **STRAIGHT GRINDER**



QC

DIMENSIONS (MM)	FASTENER	ZIRCON+				RPM MAX.	
Ø A		Z+36	Z+60	Z+80	Z+120		
50	R-Type	262 771	262 774	262 775	262 777	25,000	100
75		262 781	262 784	262 785	262 787	20,000	50

QUICK CHANGE DISCS ALUMINIUM OXIDE

The all-rounder for industrial and craft applications. Suitable for coarse to fine grinding, offering a balanced ratio of stock removal and service life.

STEEL **MINI ANGLE GRINDER** **STRAIGHT GRINDER**



QC

DIMENSIONS (MM)	FASTENER	ALUMINIUM OXIDE						RPM MAX.	
Ø A		A36	A60	A80	A120	A180	A240		
38	R-Type	262 021	262 024	262 025	262 027	262 029	262 031	25,000	100
50		262 041	262 044	262 045	262 047	262 049	262 051		
75		262 061	262 064	262 065	262 067	262 069	262 071	20,000	50
38	S-Type	262 121	262 124	262 125	262 127	262 129	262 131	25,000	100
50		262 141	262 144	262 145	262 147	262 149	262 151		
75		262 161	262 164	262 165	262 167	262 169	262 171	20,000	50

› ACCESSORIES

QUICK CHANGE HOLDER



QCH

DIMENSIONS (MM)		SPECIFICATION	ARTICLE NUMBER	
Ø A	Ø B			
38	6	R-Type	263 160	1
		S-Type	263 161	
50	6	R-Type	263 170	
		S-Type	263 171	
75	6	R-Type	263 180	
		S-Type	263 181	
75	M14	R-Type	263 185	
		S-Type	263 187	

FLAP WHEELS
CERAMIC

Aggressive grinding and maximum stock removal on hard materials.
The self-sharpening ceramic grain ensures top performance throughout the entire service life.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

STRAIGHT GRINDER





WF

DIMENSIONS (MM)			CERAMIC				RPM OPT.	RPM MAX.	
Ø A	B	Ø C	K40	K60	K80	K120			
30	15	6	102 012	102 014	102 016	102 018	16,000	26,000	10
40	20		102 092	102 094	102 096	102 098	13,000	20,000	
50	30		102 182	102 184	102 186	–	11,000	16,000	
60	30		102 252	102 254	102 256	–	9,000	13,500	



FLAP WHEELS
ALUMINIUM OXIDE

The all-rounder – suitable for both coarse and fine grinding, offering a balanced ratio between stock removal and service life.

STEEL

STRAIGHT GRINDER





WF

DIMENSIONS (MM)			ALUMINIUM OXIDE							RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A40	A60	A80	A120	A150	A240	A320			
30	5	3	–	103 544	103 545	103 547	103 548	103 550	103 551	16,000	26,000	10
	10		–	103 564	103 565	103 567	103 568	103 570	103 571			
	5	6	–	100 484	100 485	100 487	100 488	100 490	100 491			
	10		–	100 504	100 505	100 507	100 508	100 510	100 511			
	15		100 522	100 524	100 525	100 527	100 528	100 530	100 531			
	20		100 542	100 544	100 545	100 547	100 548	100 550	100 551			
	30		100 582	100 584	100 585	100 587	100 588	100 590	100 591			
	50		100 622	100 624	100 625	100 627	100 628	100 630	100 631			
40	5	6	–	100 744	100 745	100 747	100 748	100 750	100 751	13,000	20,000	10
	10		–	100 764	100 765	100 767	100 768	100 770	100 771			
	15		100 782	100 784	100 785	100 787	100 788	100 790	100 791			
	20		100 802	100 804	100 805	100 807	100 808	100 810	100 811			
	30		100 842	100 844	100 845	100 847	100 848	100 850	100 851			
50	5	6	–	100 984	100 985	100 987	100 988	100 990	100 991	11,000	16,000	10
	10		–	101 004	101 005	101 007	101 008	101 010	101 011			
	15		101 042	101 044	101 045	101 047	101 048	101 050	101 051			
	20		101 062	101 064	101 065	101 067	101 068	101 070	101 071			
	30		101 102	101 104	101 105	101 107	101 108	101 110	101 111			
	40		101 122	101 124	101 125	101 127	101 128	101 130	101 131			
60	5	6	–	101 244	101 245	101 247	101 248	101 250	101 251	9,000	13,500	10
	10		–	101 264	101 265	101 267	101 268	101 270	101 271			
	15		101 282	101 284	101 285	101 287	101 288	101 290	101 291			
	20		101 302	101 304	101 305	101 307	101 308	101 310	101 311			
	30		101 342	101 344	101 345	101 347	101 348	101 350	101 351			
	40		101 362	101 364	101 365	101 367	101 368	101 370	101 371			
	50		101 382	101 384	101 385	101 387	101 388	101 390	101 391			
80	5	6	–	101 564	101 565	101 567	101 568	101 570	101 571	6,000	10,000	10
	10		–	101 584	101 585	101 587	101 588	101 590	101 591			
	15		101 602	101 604	101 605	101 607	101 608	101 610	101 611			
	20		101 622	101 624	101 625	101 627	101 628	101 630	101 631			
	30		101 662	101 664	101 665	101 667	101 668	101 670	101 671			
	40		101 682	101 684	101 685	101 687	101 688	101 690	101 691			
	50		101 702	101 704	101 705	101 707	101 708	101 710	101 711			
100	15	6	–	101 824	101 825	101 827	101 828	101 830	101 831	5,500	7,000	10
	30		101 882	101 884	101 885	101 887	101 888	101 890	101 891			
	50		101 922	101 924	101 925	101 927	101 928	101 930	101 931			

Items marked with an asterisk (*) are subject to a **minimum order quantity of 100 pcs** per article number.

MINI FLAP WHEELS
ALUMINIUM OXIDE

Especially suitable for processing hard-to-reach areas.

STEEL **STRAIGHT GRINDER**



WM

DIMENSIONS (MM)			ALUMINIUM OXIDE							RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A40	A60	A80	A120	A150	A240	A320			
10	5	3	–	–	103 035	103 037	103 038	103 040	–	26,000	35,000	10
	10			103 004	103 005	103 007	103 008	103 010	103 011			
	15			103 024	103 025	103 027	103 028	103 030	103 031			
	20			103 044	103 045	103 047	103 048	103 050	103 051			
15	5	3	–	103 064	103 065	103 067	103 068	103 070	103 071	24,000	35,000	10
	10			103 084	103 085	103 087	103 088	103 090	103 091			
	15			103 104	103 105	103 107	103 108	103 110	103 111			
	20			103 124	103 125	103 127	103 128	103 130	103 131			
15	5	6	–	100 004	100 005	100 007	100 008	100 010	–			
	10			100 024	100 025	100 027	100 028	100 030	100 031			
	15			100 044	100 045	100 047	100 048	100 050	100 051			
	20			100 064	100 065	100 067	100 068	100 070	100 071			
20	5	3	–	103 204	103 205	103 207	103 208	103 210	103 211	20,000	30,000	10
	10		103 222	103 224	103 225	103 227	103 228	103 230	103 231			
	15		103 242	103 244	103 245	103 247	103 248	103 250	103 251			
	20		103 262	103 264	103 265	103 267	103 268	103 270	103 271			
20	5	6	–	100 144	100 145	100 147	100 148	100 150	100 151			
	10		100 162	100 164	100 165	100 167	100 168	100 170	100 171			
	15		100 182	100 184	100 185	100 187	100 188	100 190	100 191			
	20		100 202	100 204	100 205	100 207	100 208	100 210	100 211			
	25		100 222	100 224	100 225	100 227	100 228	100 230	–			
	30		100 242	100 244	100 245	100 247	100 248	100 250	100 251			
25	5	3	–	103 364	103 365	103 367	103 368	103 370	103 371	18,000	26,000	10
	10		103 382	103 384	103 385	103 387	103 388	103 390	103 391			
	15		103 402	103 404	103 405	103 407	103 408	103 410	103 411			
	20		103 422	103 424	103 425	103 427	103 428	103 430	103 431			
25	5	6	–	100 304	100 305	100 307	100 308	100 310	–			
	10		100 322	100 324	100 325	100 327	100 328	100 330	100 331			
	15		100 342	100 344	100 345	100 347	100 348	100 350	100 351			
	20		100 362	100 364	100 365	100 367	100 368	100 370	100 371			
	25		100 382	100 384	100 385	100 387	100 388	100 390	100 391			
	30		100 402	100 404	100 405	100 407	100 408	100 410	100 411			

FLAP WHEELS
ALUMINIUM OXIDE
WITH M4 THREAD

Special flap wheel with M4 thread.

STEEL **STRAIGHT GRINDER**



WM/WF

DIMENSIONS (MM)			ALUMINIUM OXIDE			RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A60	A80	A120			
20*	10	M4	131 610	131 611	131 613	20,000	30,000	10
25*			131 870	131 871	131 872	18,000	26,000	
30*			132 281	132 282	132 284	16,000	26,000	

FLAP WHEELS
ALUMINIUM OXIDE
WITH 6/70 MM SHANK

For various surface treatment applications. 6 mm shank that is 70 mm length.

STEEL **STRAIGHT GRINDER**



WM

DIMENSIONS (MM)			ALUMINIUM OXIDE			RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A60	A80	A120			
15*	10	6/70	130 484	130 485	130 487	24,000	35,000	10
	15		130 844	130 845	130 847			
20*	10		131 544	131 545	131 547	20,000	30,000	
	15		131 680	131 681	131 682			

FLAP WHEELS
ALUMINIUM OXIDE
WITH 6/100 MM SHANK

Particularly versatile flap wheels. 6 mm shank that is 100 mm length.

STEEL **STRAIGHT GRINDER**



WF

DIMENSIONS (MM)			ALUMINIUM OXIDE			RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A60	A80	A120			
30*	10	6/100	132 151	132 152	132 153	16,000	26,000	10
	15		132 300	132 301	132 302			

FLAP WHEEL CUPS
ALUMINIUM OXIDE

Recessed core allows operator to sand with the sides of the flap, in addition to the edges.

STEEL **STRAIGHT GRINDER**





WT

DIMENSIONS (MM)			ALUMINIUM OXIDE				RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A60	A80	A120	A150			
40	30	6	108 604	108 605	108 607	108 608	13,000	17,000	10
60	40		108 724	108 725	108 727	108 728	9,000	10,200	

CYLINDRICAL CARTRIDGE ROLLS
ALUMINIUM OXIDE

Our cylindrical cartridge rolls are made of aluminium oxide abrasive cloth. Their construction and materials make them especially durable, saving tool changeover time.

STEEL **STRAIGHT GRINDER**





SR

DIMENSIONS (MM)			ALUMINIUM OXIDE				RPM MAX.	
Ø A	B	Ø C	A60	A80	A120	A180		
4.8	19	2.4	–	158 084	158 086	158 088	26,000	100
	25			158 104	158 106	158 108		
6	25	3.2	158 163	158 164	158 166	158 168		
	38		158 183	158 184	158 186	158 188		
8	38	3.2	158 283	158 284	158 286	158 288		
10	25	3.2	158 363	158 364	158 366	158 368		
	38		158 383	158 384	158 386	158 388		
	50		158 403	158 404	158 406	158 408		
13	25	3.2	158 463	158 464	158 466	158 468		
	38		158 503	158 504	158 506	158 508		
	50		158 543	158 544	158 546	158 548		
19	25	4.8	159 083	159 084	159 086	–	18,000	
	38		159 143	159 144	159 146			
25	38	6.4	159 403	159 404	159 406	–	15,000	

FULL TAPER CARTRIDGE ROLLS
ALUMINIUM OXIDE

For grinding in hard-to-reach areas. Our conical (or full tapered) cartridge rolls are made of aluminium oxide abrasive cloth. Their conical construction is ideal for hard-to-reach areas.

STEEL **STRAIGHT GRINDER**





SRK

DIMENSIONS (MM)			ALUMINIUM OXIDE			RPM MAX.	
Ø A	B	Ø C	A60	A80	A120		
10	25	3.2	160 003	160 004	160 006	26,000	100
	38		160 023	160 024	160 026		
13	25		160 063	160 064	160 066		
	38		160 083	160 084	160 086		
19	25		160 323	160 324	160 326	18,000	
	38		160 383	160 384	160 386		
25	38	4.8	160 643	160 644	160 646	15,000	

› ACCESSORIES

THREADED MANDREL
FOR CARTRIDGE ROLLS

Suitable threaded mandrel for cartridge rolls.



TYPE SRD

DIMENSIONS (MM)			LENGTH (MM)	ARTICLE NUMBER	
Ø A	B	Ø C			
2.4	13	3	25	161 901	1
	19			161 902	
3.2	25			161 913	
	19	6		161 921	
	25			161 927	
	38		31.75	161 933	
4.8	19			161 948	
	25			161 952	
6.4	25			161 966	

CROSS PADS
ALUMINIUM OXIDE

Our abrasive cross pads are made of high-quality aluminium oxide abrasive cloth.
A suitable 6 mm mandrel is also available.

STEEL **STRAIGHT GRINDER**



SK


DIMENSIONS (MM)		LAYERS	EYELET	ALUMINIUM OXIDE		RPM MAX.	
Diameter	Breite			A60	A80		
38	12	8	8–32	900 320	900 321	23,000	100
50				900 330	900 331		
50	20			900 340	900 341		

› ACCESSORIES



MANDREL FOR CROSS PADS

DESCRIPTION	ARTICLE NUMBER	
6 mm mandrel for cross pads.	900 996	1

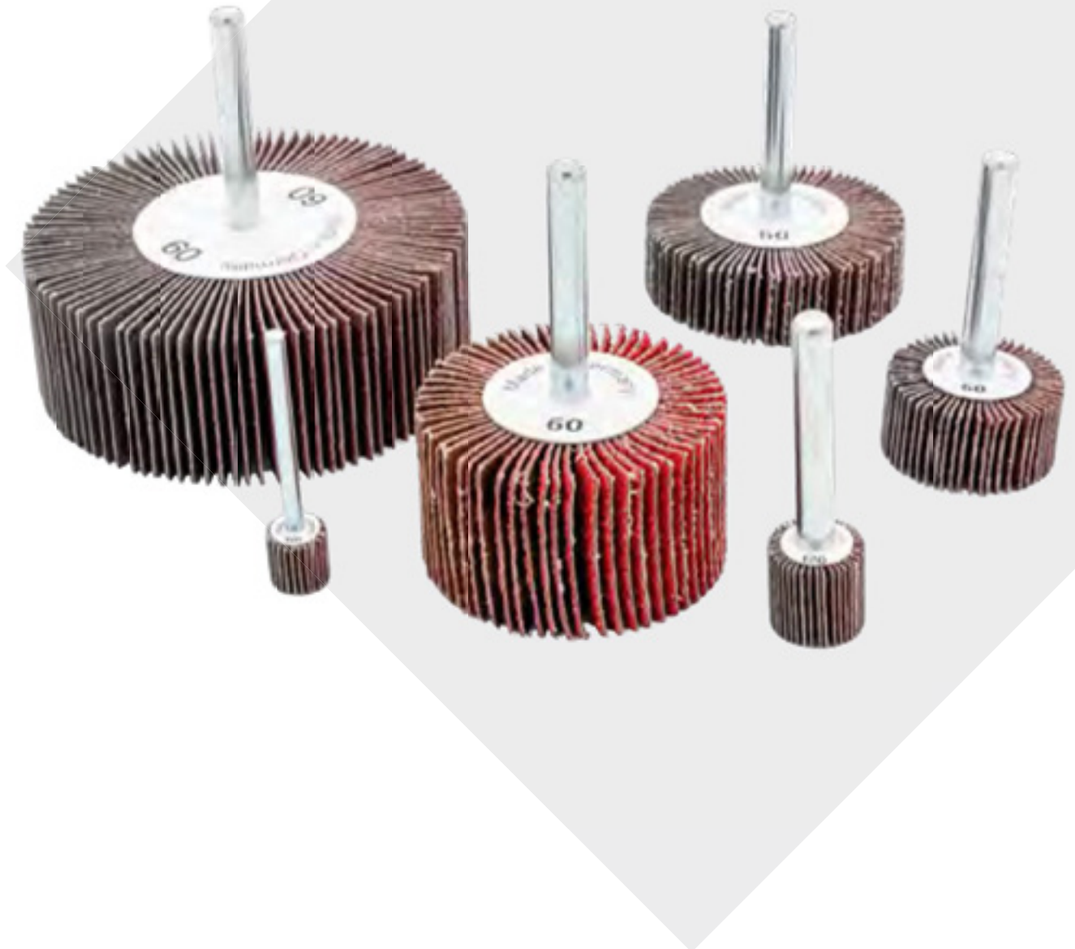

UNMOUNTED FLAP WHEELS

THREADED FLAP WHEELS M14 CERAMIC

Particularly aggressive stock removal on hard materials. The self-sharpening ceramic grain ensures top performance throughout the entire service life. Wendt threaded flap wheels can be safely used on angle grinders.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

ANGLE GRINDER



LS M14

DIMENSIONS (MM)			CERAMIC			RPM MAX.	
Ø A	B	Ø C	K40	K60	K80		
115	20	M14	325 365	325 366	325 367	13,000	2
125			325 385	325 386	325 387	12,250	

THREADED FLAP WHEELS M14 ALUMINIUM OXIDE

The all-rounder for coarse to fine grinding.

STEEL **ANGLE GRINDER**



LSM14

DIMENSIONS (MM)			ALUMINIUM OXIDE							RPM MAX.	
Ø A	B	Ø C	A40	A60	A80	A120	A180	A240	A320		
115	20	M14	325 302	325 304	325 305	325 307	325 309	325 311	325 312	13,000	2
125			325 322	325 324	325 325	325 327	325 329	325 331	325 332	12,250	

UNMOUNTED FLAP WHEELS ALUMINIUM OXIDE

For best results under the highest demands, such as in industrial applications.

STEEL **BENCH GRINDER**

To ensure maximum safety, always use our reusable side mounting plates.



LS

DIMENSIONS (MM)			ALUMINIUM OXIDE					RPM MAX.	
Ø A	B	Ø C	A40	A60	A80	A120	A180		
100	30	19	327 002	327 004	327 005	327 007	327 009	8,000	2
		21	327 022	327 024	327 025	327 027	327 029		
140	50	19	327 702	327 704	327 705	327 707	327 709	6,200	
		21	327 722	327 724	327 725	327 727	327 729		
150	25	25	327 982	327 984	327 985	327 987	327 989	5,800	
	50		328 202	328 204	328 205	328 207	328 209		
	25	44	327 942	327 944	327 945	327 947	327 949		
	50		328 142	328 144	328 145	328 147	328 149		
165	25	25	328 342	328 344	328 345	328 347	328 349	5,500	
	30		328 562	328 564	328 565	328 567	328 569		
	50		328 802	328 804	328 805	328 807	328 809		
	25	44	328 362	328 364	328 365	328 367	328 369		
	30		328 582	328 584	328 585	328 587	328 589		
	50		328 822	328 824	328 825	328 827	328 829		
200	25	69	329 062	329 064	329 065	329 067	329 069	4,500	
	50		329 282	329 284	329 285	329 287	329 289		
250	30	69	329 942	329 944	329 945	329 947	329 949	3,500	
	50		330 162	330 164	330 165	330 167	330 169		
	100		330 602	330 604	330 605	330 607	330 609		
300	50	100	330 662	330 664	330 665	330 667	330 669	2,800	
	100		330 722	330 724	330 725	330 727	330 729		
350	50	132	330 782	330 784	330 785	330 787	330 789	2,500	
400	50	153	331 142	331 144	331 145	331 147	331 149	2,200	



Unmounted Flap Wheels with MDF core available upon request.

SIDE MOUNTING PLATES

Reusable side mounting plates for unmounted flap wheels with borehole.



Using the side mounting plates slightly increases the total width of the tool.

SP

DIMENSIONS (MM)				ARTICLE NUMBER	
Ø Unmounted Flap Wheel	Ø Plates	Ø Borehole (minimum)	Expansion Ø borehole up to (maximum)		
100–140	55	10	20	340 000	1 pair
150–165	79	12	40	340 100	
200–250	122	14	60	340 300	
300	156	20	80	340 500	
350	201	25	120	340 600	
400	225	25	140	340 700	




FLAP BANDS
CERAMIC

Maximum aggressiveness and stock removal on hard materials.
The self-sharpening ceramic grain ensures top performance throughout the entire service life.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

STRAIGHT GRINDER

Always use an expanding drum and observe the direction of rotation.

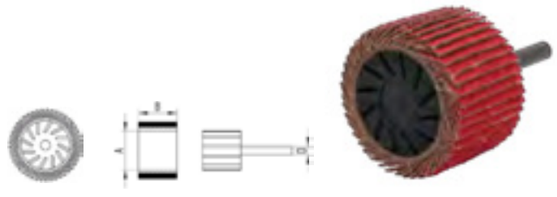

LH

DIMENSIONS (MM)		CERAMIC			RPM MAX.	
Ø A	B	K40	K60	K80		
30	20	152 062	152 064	152 065	19,100	10
	30	152 162	152 164	152 165		
45		152 262	152 264	152 265	12,700	
60		152 342	152 344	152 345	9,500	
75		152 442	152 444	152 445	7,600	

FLAP BANDS
ZIRCONIA

This version is particularly suitable for coarse grinding tasks. It also offers high stock removal and long service life.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

STRAIGHT GRINDER

Always use an expanding drum and observe the direction of rotation.



LH

DIMENSIONS (MM)		ZIRCONIA				RPM MAX.	
Ø A	B	R40	R60	R80	R120		
22	20	151 022	151 024	151 025	151 027	26,000	10
30		151 122	151 124	151 125	151 127	19,100	
	30	151 162	151 164	151 165	151 167		
45		151 262	151 264	151 265	151 267	12,700	
60		151 342	151 344	151 345	151 347	9,500	
75		151 442	151 444	151 445	151 447	7,600	

Zirconia flap bands in Ø 150 and 200 mm available upon request.





Flap bands in aluminium oxide available upon request.

SPIRAL BANDS
ALUMINIUM OXIDE

These tools are made of aluminium oxide and suitable for a wide range of applications from coarse to fine grinding. This version is especially designed for coarse grinding, ensuring high stock removal and long service life.

STEEL **STRAIGHT GRINDER**



SH

DIMENSIONS (MM)		ALUMINIUM OXIDE			RPM MAX.	
Ø A	B	A50	A80	A150		
10	20	153 163	153 165	153 168	44,000	50
13	25	153 303	153 305	153 308		
22	20	153 603	153 605	153 608	26,000	
30	30	153 783	153 785	153 788	19,100	

› ACCESSORIES

EXPANDING DRUMS

Reusable expanding drum for our flap bands and spiral bands.

Observe the direction of rotation!



E

DIMENSIONS (MM)			ARTICLE NUMBER	
Ø A	B	Ø D		
10	20	6	157 507	1
13	25		157 514	
22	20		150 951	
30			150 953	
	30		150 955	
45			150 957	
60			150 959	
75		8	150 961	

FLAP ROLLS


FLAP ROLLS CERAMIC

Self-sharpening ceramic grain ensures maximum stock removal throughout the entire service life. Ideal for stainless steel and nickel alloys. These tools also provide a cooler grinding process.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

SATIN FINISHING MACHINE





Many sizes also available with 5/8–11" thread!

LW

DIMENSIONS (MM)			CERAMIC		RPM MAX.	
Ø A	B	Ø C	K40	K60		
100	100	19	323 174	323 175	5,000	1
		M14	323 214	323 215		
110			323 234	323 235		

FLAP ROLLS ALUMINIUM OXIDE

The all-rounder for numerous surfaces, suitable for both coarse and fine grinding. Particularly suitable for removing rust, scale, and for deburring.

STEEL **SATIN FINISHING MACHINE**





Many sizes also available with 5/8–11" thread!

LW

DIMENSIONS (MM)			ALUMINIUM OXIDE							RPM MAX.	
Ø A	B	Ø C	A40	A60	A80	A120	A180	A240	A320		
100	50	19	323 062	323 063	323 064	323 066	323 068	323 069	323 070	5,000	2
	100	19	323 162	323 163	323 164	323 166	323 168	323 169	323 170		1
		M14	323 202	323 203	323 204	323 206	323 208	323 209	323 210		
110	100	19	323 122	323 123	323 124	323 126	323 128	323 129	323 130		
		M14	323 222	323 223	323 224	323 226	323 228	323 229	323 230		

Flap rolls also available on request in 100 x 120 x 12 mm and other dimensions.

TWINPOWER CERAMIC WITH OPENINGS

Self-sharpening ceramic grain enables aggressive stock removal and consistent peak performance.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM

ANGLE GRINDER





5/8–11" thread available upon request.

TPL

DIMENSIONS (MM)		CERAMIC			RPM MAX.	
Ø A	Ø B	K40	K60	K80		
125	M14	260 221	260 223	260 224	12,250	10

TWINPOWER ZIRCONIA WITH OPENINGS

This version is particularly suitable for coarse grinding and provides high stock removal and long service life.

STEEL | STAINLESS STEEL (INOX) **ANGLE GRINDER**





5/8–11" thread available upon request.

TPL

DIMENSIONS (MM)		ZIRCONIA			RPM MAX.	
Ø A	Ø B	Z40	Z60	Z80		
115	M14	260 121	260 123	260 124	13,300	10
125		260 131	260 133	260 134	12,250	

TWINPOWER ZIRCONIA WITHOUT OPENINGS



5/8–11" thread available upon request.

TP

DIMENSIONS (MM)		ZIRCONIA			RPM MAX.	
Ø A	Ø B	Z40	Z60	Z80		
115	M14	260 091	260 093	260 094	13,300	10
125		260 101	260 103	260 104	12,250	

› ACCESSORIES



STAINLESS STEEL ADAPTER

TWINPOWER Adapter M14 made of stainless steel.	ARTICLE NUMBER	
	261 290	1

Only suitable for a limited number of applications.



PLASTIC ADAPTER

TWINPOWER Adapter M14 made of plastic.	ARTICLE NUMBER	
	261 291	1



CONTENTS

4.1 INTERLEAVED **59**

4.2 NONWOVEN **64**









MATERIALS THAT CAN BE PROCESSED
Stainless steel (INOX) and alloys | Copper | Titanium | Nickel | Brass
Aluminium | Plastics | Glass | Ceramic

APPLICATIONS
Fine surface finishing | Light cleaning | Deburring | Surface preparation
for polishing | Texturing | Surface finishing

ADVANTAGES
- The open structure and flexibility prevent clogging
- High flexibility ensures ideal contour adaptation
- Cool grinding results in low thermal stress on the material

G-WENDT

NON-WOVEN AND INTERLEAVED ABRASIVES

This product section includes both full Nonwoven tools and tools that combine Nonwoven with abrasives on backing – referred to as Interleaved tools. Thanks to this combination, the tool benefits from both stock removal and finishing performance.



INTERLEAVED


HYBRID FLAP DISCS

This tool combination enables fast stock removal, cooler grinding, and excellent, consistent finishing results.

Advantages:
- Time-saving
- Grinding and finishing in a single step
- Controlled material removal
- Uniform grinding result
- Lower heat generation increases tool life

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

ANGLE GRINDER

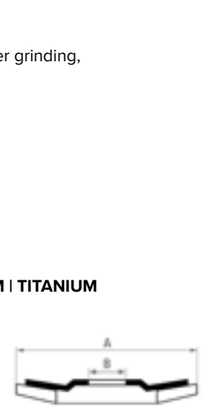





HG29 (CONICAL)

DIMENSIONS (MM)		SPECIFICATION		RPM OPT.	RPM MAX.	
Ø A	Ø B	Coarse	Medium			
115	22.23	245 172	245 173	7,000	13,300	5
125		245 181	245 183	6,500	12,250	

POLYPOWER
INTERLEAVED

These tools are ideal for processing large surfaces, especially when used with a variable-speed angle grinder. Densely packed flaps also ensure long service life.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

ANGLE GRINDER







GK (FLAT)


DIMENSIONS (MM)		SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A	Ø B	A80 I Medium	A150 I Fine	A240 I Very Fine			
115	22.23	245 013	245 016	245 018	3,300	8,500	5
125		245 033	245 036	245 038	3,000	7,700	

THREADED FLAP WHEELS M14
INTERLEAVED

These tools are used for processing medium-sized surfaces and are ideally suited for use with variable-speed angle grinders.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

ANGLE GRINDER

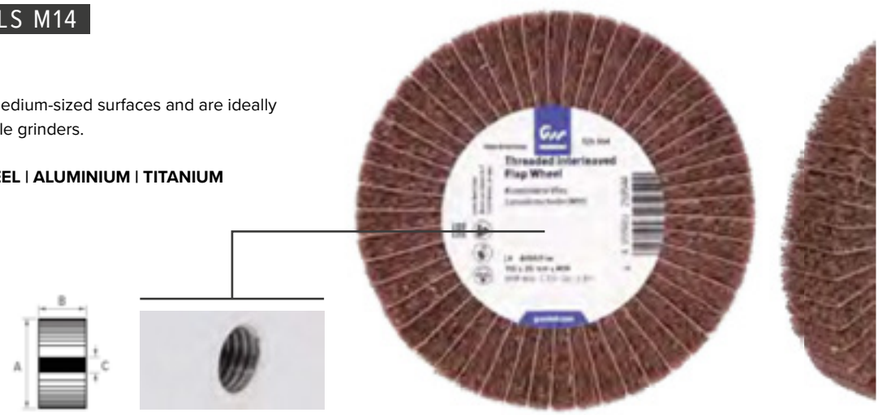

LK M14

DIMENSIONS (MM)			SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A80 I Medium	A150 I Fine	A240 I Very Fine			
115	20	M14	325 952	325 954	325 956	2,800	3,700	1
125			325 962	325 964	325 966	2,000	3,200	

UNMOUNTED FLAP WHEELS
INTERLEAVED

Designed for stationary use. Allows the user to deburr, clean, and achieve a brushed surface finish in just one step.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

BENCH GRINDER



LK

DIMENSIONS (MM)			SPECIFICATION				RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A60 I Coarse	A80 I Medium	A150 I Fine	A240 I Very Fine			
100	30	25.4	353 002	353 004	353 008	353 012	3,000	3,700	1
150			353 222	353 224	353 228	353 232	2,000	3,200	
	50		353 282	353 284	353 288	353 292			
200	30		353 442	353 444	353 448	353 452	1,500	2,400	
200	50		353 502	353 504	353 508	353 512			



Unmounted Flap Wheels with MDF core available upon request.

MINI POLYPOWER
INTERLEAVED

These flexible all-rounders are suitable for a wide range of applications and are available with both internal and external threads.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

MINI-ANGLE GRINDER **STRAIGHT GRINDER**

Matching adapters are also available in our range.

R-TYPE

INTERNAL THREAD





KK (FLAT)

DIMENSIONS (MM)	FASTENER	SPECIFICATION			RPM OPT.	RPM MAX.	
Ø		A80 I Medium	A150 I Fine	A240 I Very Fine			
50	Internal thread	245 063	245 066	245 068	7,600	19,100	10
75		245 073	245 076	245 078	5,000	12,700	
50	R-Type	245 083	245 085	245 087	7,600	19,100	
75		245 093	245 095	245 097	5,000	12,700	

› ACCESSORIES



SHANK FOR MINI POLYPOWER WITH INTERNAL THREAD

DIMENSIONS (MM)		ARTICLE NUMBER	
Ø A	B		
6	40	230 998	1



QUICK-CHANGE HOLDER

DIMENSIONS (MM)		FASTENER	ARTICLE NUMBER	
Ø A	Ø B			
50	6	R-Type	263 170	1
75	6		263 180	
	M14		263 185	

FLAP WHEELS
INTERLEAVED

Our interleaved flap wheels are available in various versions and produce brushed surface finishes. Cooler grinding promotes longer tool life and consistent results.


STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

STRAIGHT GRINDER



WVK

DIMENSIONS (MM)			SPECIFICATION				RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A60 | Coarse	A80 | Medium	A150 | Fine	A240 | Very Fine			
20	20	3	192 500	192 501	192 504	192 506	9,000	11,000	10
		6	190 000	190 001	190 004	190 006			
25	50		190 200	190 201	190 204	190 206	8,400	10,700	
30	20		190 320	190 321	190 324	190 326	8,200	10,500	
	50		190 440	190 441	190 444	190 446			
40	20		190 560	190 561	190 564	190 566	7,500	9,000	
	30		190 640	190 641	190 644	190 646			
50	20		190 800	190 801	190 804	190 806	6,000	8,000	
	30		190 880	190 881	190 884	190 886			
	40		190 920	190 921	190 924	190 926			
60	30		191 080	191 081	191 084	191 086	5,000	7,000	
	40		191 120	191 121	191 124	191 126			
	50		191 160	191 161	191 164	191 166			
80	40		191 520	191 521	191 524	191 526	4,000	6,000	
	50		191 560	191 561	191 564	191 566			
100			191 840	191 841	191 844	191 846	3,000	4,000	




FLAP ROLLS
INTERLEAVED

These tools allow users to repair or finish large surfaces, tanks, and railings. They offer flexible use – ideal for both production environments and on-site assembly.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM


SATIN FINISHING MACHINE





KW

DIMENSIONS (MM)			SPECIFICATION				RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A60 | Coarse	A80 | Medium	A150 | Fine	A240 | Very Fine			
100	50	19	323 431	323 432	323 435	323 437	2,000	5,000	2
	100		323 481	323 482	323 485	323 487			1
		M14	323 501	323 502	323 505	323 507			
	120	12	–	323 492	–	323 497			
110	100	19	323 461	323 462	323 465	323 467			
		M14	323 511	323 512	323 515	323 517			

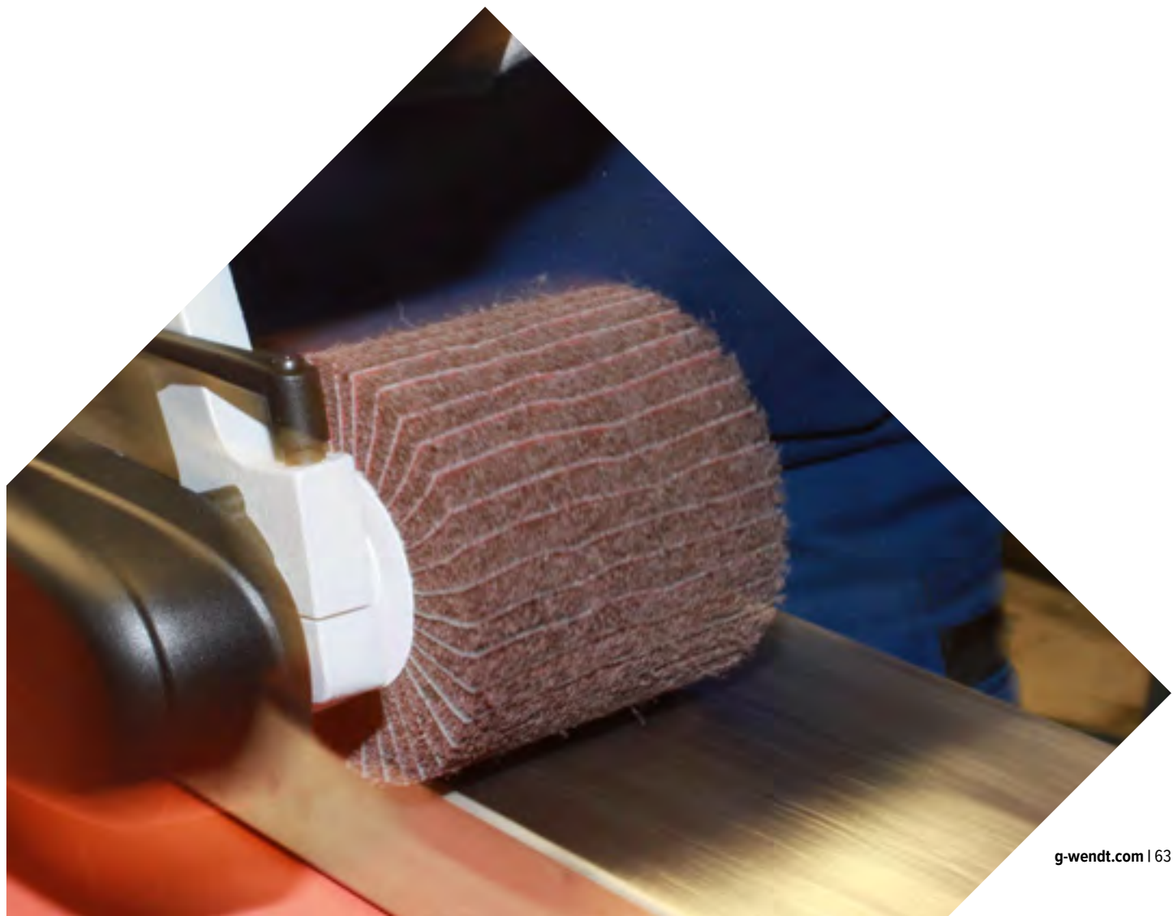



NONWOVEN

FLAP DISCS SCM


These tools are made of durable nylon fibres and deliver consistent surface results throughout their service life. Thanks to their flexibility, they adapt to contours.

From coarse to fine grinding, consistently high performance and durability for trade and industry:

- Final surface finishing
- Fine grinding of large areas
- Cleaning weld seams
- Removing temper colours
- Structuring

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

ANGLE GRINDER







SCM G27 (CONICAL 8°)

DIMENSIONS (MM)		SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A	Ø B	Coarse | Light Brown	Medium | Reddish Brown	Very Fine | Blue			
115	22.23	245 431	245 432	245 434	5,800	13,300	10
125		245 451	245 452	245 454	5,300	12,250	
178		245 471	245 472	245 474	3,700	8,500	

POLYPOWER

Suitable for a wide range of applications from cleaning to fine grinding. Used for final surface treatment, cleaning, and versatile finishing work on large areas.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

ANGLE GRINDER



GV (FLAT)

DIMENSIONS (MM)		SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A	Ø B	A-Medium	A-Fine	A-Very Fine			
115	22.23	245 212	245 214	245 215	3,300	8,500	5
125		245 232	245 234	245 235	3,000	7,700	



SCM HOOK & LOOP DISCS

Heavy duty Surface Conditioning discs with hook & loop backing pad and designed for surface finishing.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

ANGLE GRINDER



SCM

DIMENSIONS (MM)	SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A	Coarse | Light Brown	Medium | Reddish Brown	Very Fine | Blue			
115	262 991	262 992	262 993	3,300	10,000	10
125	262 996	262 997	262 998	3,000	9,000	
178	263 006	263 007	263 008	2,200	6,500	

› ACCESSORIES

BACKING PADS

For G-WENDT SCM non-woven Hook & Loop discs.



ST

DIMENSIONS (MM)		ARTICLE NUMBER	
Ø A	Ø B		
115	M14	263 204	1
125		263 206	
178		263 210	

THREADED FLAP WHEELS M14
NONWOVEN

For processing medium-sized surfaces using a variable-speed angle grinder.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

ANGLE GRINDER



LV M14

DIMENSIONS (MM)			SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A-Medium	A-Fine	A-Very Fine			
115	20	M14	326 851	326 852	326 853	2,800	3,700	1
125			326 861	326 862	326 863	2,000	3,200	

UNMOUNTED FLAP

These tools are designed for stationary applications.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

BENCH GRINDER



LV

DIMENSIONS (MM)			SPECIFICATION				RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A-Coarse	A-Medium	A-Fine	A-Very Fine			
100	30	25.4	360 002	360 003	360 004	360 005	3,000	3,700	1
150	30		360 222	360 223	360 224	360 225	2,000	3,200	
	50		360 302	360 303	360 304	360 305			
200	30		360 442	360 443	360 444	360 445	1,500	2,400	
	50		360 542	360 543	360 544	360 545			



Unmounted Flap Wheels also available with MDF core upon request.

MINI POLYPOWER
QUICK-CHANGE SYSTEM

Provides excellent contour adaptability and is suitable for almost all materials.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

MINI-ANGLE GRINDER **STRAIGHT GRINDER**

R-TYPE

INTERNAL THREAD



KV (FLAT)

DIMENSIONS (MM)	FASTENER	SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A		A-Medium	A-Fine	A-Very Fine			
50	Internal thread	245 262	245 264	245 265	7,600	19,100	10
75		245 272	245 274	245 275	5,000	12,700	
50	R-Type	245 282	245 284	245 285	7,600	19,100	
75		245 292	245 294	245 295	5,000	12,700	

HS SATIN FINISHING
QUICK-CHANGE DISCS

These variants use highly strength non-woven material, reinforcing the tools for longer life and enabling work on edges and corners.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

MINI-ANGLE GRINDER **STRAIGHT GRINDER**

R-TYPE

S-TYPE



QC

DIMENSIONS (MM)	FASTENER	SPECIFICATION			RPM MAX.	
Ø A		A-Medium HS	A-Fine HS	A-Very Fine HS		
50	R-Type	263 083	263 084	263 085	12,000	10
75		263 086	263 087	263 088	8,000	
50	S-Type	263 089	263 090	263 091	12,000	
75		263 092	263 093	263 094	8,000	

QUICK-CHANGE DISCS
SURFACE CONDITIONING

For light deburring, surface preparation, weld seam cleaning, and general surface finishing – especially on steel and stainless steel (INOX).

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

MINI-ANGLE GRINDER **STRAIGHT GRINDER**

R-TYPE

S-TYPE



QC

DIMENSIONS (MM)	FASTENER	SPECIFICATION			RPM MAX.	
Ø A		Coarse | Light Brown	Medium | Reddish Brown	Very Fine | Blue		
38	R-Type	262 906	262 907	262 908	30,000	100
50		262 911	262 912	262 913	23,000	50
75		262 916	262 917	262 918	20,000	25
38	S-Type	262 931	262 932	262 933	30,000	100
50		262 936	262 937	262 938	23,000	50
75		262 941	262 942	262 943	20,000	25

FLAP WHEELS
NONWOVEN

Excellent for general surface finishing and contours.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | TITANIUM

STRAIGHT GRINDER





WV

DIMENSIONS (MM)			SPECIFICATION						RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A-Coarse	A-Medium	A-Fine	A-Very Fine	S-Super Fine	S-Ultra Fine			
20	20	3	107 020	107 021	107 022	107 023	107 024	–	9,000	11,000	10
		6	106 020	106 021	106 022	106 023	106 024	–			
25	50		–	106 071	106 072	106 073	106 074	–	8,400	10,700	
30	20	3	107 100	107 101	107 102	107 103	107 104	–	8,200	10,500	
		6	106 100	106 101	106 102	106 103	106 104	–			
	50		106 120	106 121	106 122	106 123	106 124	–			
40	20		106 140	106 141	106 142	106 143	106 144	–	7,500	9,000	
	30		106 160	106 161	106 162	106 163	106 164	–			
50	20		106 210	106 211	106 212	106 213	106 214	–	6,000	8,000	
	30		106 230	106 231	106 232	106 233	106 234	–			
	40		106 240	106 241	106 242	106 243	106 244	106 245			
60	30		106 270	106 271	106 272	106 273	106 274	–	5,000	7,000	
	40		106 280	106 281	106 282	106 283	106 284	–			
	50		106 290	106 291	106 292	106 293	106 294	106 295			
80	40		106 360	106 361	106 362	106 363	106 364	–	4,000	6,000	
	50		106 380	106 381	106 382	106 383	106 384	106 385			
100			106 460	106 461	106 462	106 463	106 464	106 465	3,000	4,000	

› ACCESSORIES



SHANK FOR MINI POLYPOWER WITH INTERNAL THREAD

DIMENSIONS (MM)		ARTICLE NUMBER	
Ø A	B		
6	40	230 998	1



QUICK-CHANGE HOLDER

DIMENSIONS (MM)		FASTENER	ARTICLE NUMBER	
Ø A	Ø B			
50	6	R-Type	263 170	1
75	6		263 180	
	M14		263 185	

FLAP WHEELS
NONWOVEN
CUT & POLISH-MEDIUM

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | TITANIUM

STRAIGHT GRINDER





WV

DIMENSIONS (MM)			SPECIFICATION	RPM OPT.	RPM MAX.	
Ø A	B	Ø C	CP-Medium			
50	40	6	107 638	6,000	8,000	10
80	50	6	107 753	4,000	6,000	

CROSS BUFFS

Flexible product for contour work and irregular surfaces, as well as in bores and inner diameters. Also suitable for cleaning threaded holes.



STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | TITANIUM

STRAIGHT GRINDER

CB

DIMENSIONS (MM)				GRIT		RPM MAX.	
Ø	B	Layers	Eyelet	Medium	Fine		
38	10	2	8–32	900 732	900 733	20,000	50
50				900 736	900 737	12,000	

› ACCESSORIES



MANDREL FOR CROSS BUFFS

	ARTICLE NUMBER	
Reusable 6 mm mandrel. 8 x 32 x 6 – 75 mm total length	900 996	1

SCM BELTS

Made from low-stretch material for consistent tension and uniform length over the entire service life.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

BELT GRINDER



Other specifications and dimensions available upon request.

B

DIMENSIONS (MM)	GRIT	
	SCM-Medium	
6 x 305	993 123	50
89 x 394	993 122	5



HAND PADS NONWOVEN



These practical tools offer maximum flexibility and are ideal for many applications:

- Surface cleaning and preparation
- Removal of oxidation or paint
- General finishing

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | TITANIUM

HAND SANDING

VH

DIMENSIONS (MM)	COLOUR (MATERIAL)	DESCRIPTION	ARTICLE NUMBER	
150 x 230	Green (Aluminium Silicate)	GP-Green	963 030	10
	Reddish Brown (Aluminium Oxide)	A-Coarse	963 032	
		A-Medium	963 035	
		A-Fine	963 036	
		A-Very Fine	963 037	
	Black (Silicon Carbide)	S-Medium	963 040	
		S-Very Fine	963 042	
	Grey (Silicon Carbide)	S-Ultra Fine	963 041	
	White (Non-Abrasive)	Non-Abrasive	963 044	

HAND ROLLS NONWOVEN



Rolls can be cut to size to fit your application needs.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | TITANIUM

HAND SANDING

HR

DIMENSIONS (MM)	LENGTH (M)	COLOUR (MATERIAL)	DESCRIPTION	ARTICLE NUMBER	
100	10	Reddish Brown (Aluminium Oxide)	A-Medium	963 071	1
			A-Fine	963 076	
			A-Very Fine	963 081	
115			A-Medium	963 073	
			A-Fine	963 078	
			A-Very Fine	963 083	
100		Grey (Silicon Carbide)	S-Ultra Fine	963 091	
115		Grey (Silicon Carbide)	S-Ultra Fine	963 093	

HIGH STRENGTH
SATIN FINISHING DISCS

These tools can also be used for edge breaking without being too aggressive.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

STRAIGHT GRINDER **BENCH GRINDER**





VS

DIMENSIONS (MM)		GRIT			RPM MAX.	
Ø A	Ø B	A-Medium HS	A-Fine-HS	A-Very Fine-HS		
150	13	347 071	347 072	347 073	3,600	10
200		347 075	347 076	347 078	2,700	




FLAP ROLLS
NONWOVEN

These tools are optimised for use on satin finishing machines and guarantee decorative surface finishes. They can also level out light scratches.

Frequently used in the production of large tanks, e.g., food processing equipment, or in railing construction.

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

SATIN FINISHING MACHINE






VW

DIMENSIONS (MM)			SPECIFICATION					RPM OPT.	RPM MAX.	
Ø A	B	Ø C	A-Coarse	A-Medium	A-Fine	A-Very Fine	S-Ultra Fine			
100	50	19	323 730	323 731	323 732	323 733	323 734	2,000	5,000	2
	100		323 780	323 781	323 782	323 783	323 784			1
		M14	323 705	323 706	323 707	323 708	323 709			
	120	12	–	323 791	323 792	323 793	–			
110	100	19	323 760	323 761	323 762	323 763	323 764			
		M14	323 715	323 716	323 717	323 718	323 719			

FLAP ROLLS
NONWOVEN
CUT & POLISH-MEDIUM

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM | TITANIUM

SATIN FINISHING MACHINE





VW

DIMENSIONS (MM)			SPECIFICATION	RPM OPT.	RPM MAX.	
Ø A	B	Ø C	CP-Medium			
100	100	19	323 785	2,000	5,000	1
		M14	323 710			

CONTENTS

5.1	UNITIZED	**82**
5.2	CONVOLUTE	**87**
5.3	FINISHING ROLLS	**90**







MATERIALS THAT CAN BE PROCESSED
Stainless steel (INOX) | Alloyed and high-alloy steels | Aluminium
Titanium | Brass | Copper | Platinum | Zinc | Die-cast alloys
Cobalt-chromium | Nickel-based alloys

APPLICATIONS
Universal cleaning | Deburring | Matt finishing | Texturing
Pre-polishing | Final finishing

ADVANTAGES
Products from the UNITIZED and CONVOLUTE ranges, available in various sizes and specifications.

G-WENDT

PRE-POLISHING

Within the pre-polishing section, nothing is left to be desired. We offer everything related to surface finishing and pre-polishing – from UNITIZED tools and a complete CONVOLUTE product line to exceptional finishing rolls.

UNITIZED
FINISHING DISCS

The combination of non-woven abrasive and fibreglass backing provides extra strength and enables easy use on angle grinders.

Our range of variants covers a wide spectrum of applications:

- Remove light scratches
- Edge breaking
- Surface unification and excellent finishing of large areas

STEEL | STAINLESS STEEL (INOX)

ANGLE GRINDER





Ideal surface preparation before polishing.

UG27 (FLAT)

DIMENSIONS (MM)		SPECIFICATION				RPM OPT.	RPM MAX.	
Ø A	Ø B	Medium Density			Hard			
		4A Coarse	4S Medium	4S Very Fine	6S Very Fine			
115	22.23	245 814	245 817	245 819	245 871	7,850	11,000	2
125		245 834	245 837	245 839	245 873	7,000	9,800	



Exclusive to us! The user-friendly conical shape “UG29”.

UG29 (CONICAL)

DIMENSIONS (MM)		SPECIFICATION			RPM OPT.	RPM MAX.	
Ø A	Ø B	4-Medium					
		A-Coarse	S-Medium	S-Very Fine			
115	22.23	245 914	245 917	245 919	7,850	11,000	2
125		245 934	245 937	245 939	7,000	9,800	



UNITIZED
QUICK-CHANGE DISCS

The high abrasive density delivers exceptionally fine finishes on stainless steel (INOX), titanium and exotic materials. Ideal for tight tolerances and critical finishing tasks.

Key users include the aerospace industry, orthopaedics, and medical technology.

STEEL | STAINLESS STEEL (INOX)

MINI-ANGLE GRINDER **STRAIGHT GRINDER**



QC

DIMENSIONS (MM)	FASTENER	SPECIFICATION						RPM MAX.	
Ø A		2S Fine EX	2A Med EX	6S Fine EX	6A Med EX	8A Coarse EX	8A Med EX		
50	R-Type	347 474	347 470	347 475	347 471	347 472	347 473	22,000	10
75		347 484	347 480	–	347 481	347 482	347 483	15,000	

UNITIZED PRE-POLISHING
QUICK-CHANGE DISCS

This green ‘pre-polishing version’ removes very little material but excels at removing light scratches and surface defects. Used as the final step before polishing, it leaves a glossy finish.

STAINLESS STEEL (INOX) | MESSING | BRONZE

MINI-ANGLE GRINDER **STRAIGHT GRINDER**



QC

DIMENSIONS (MM)	FASTENER	SPECIFICATION	RPM MAX.	
Ø A		2S Very Fine PP		
50	R-Type	347 479	22,000	10
75		347 489	15,000	

› ACCESSORIES



QUICK-CHANGE HOLDER


DIMENSIONS (MM)		FASTENER	ARTICLE NUMBER	
Ø A	Ø B			
50	6	R-Type	263 170	1
75	6		263 180	
	M14		263 185	

UNITIZED
FINISHING WHEELS

Perfect for deburring and fine finishing on hard-to-reach areas and smaller workpieces.

STEEL | STAINLESS STEEL (INOX)

STRAIGHT GRINDER





US

DIMENSIONS (MM)			SPECIFICATION		RPM OPT.	RPM MAX.	
Ø A	B	Ø C	4 S-Medium	4 S-Very Fine			
40	12	6	106 805	106 807	7,500	9,000	10
50			106 825	106 827	6,000	8,000	
75			106 845	106 847	4,000	6,000	

UNITIZED
FINISHING DISCS

Ideal for working on fillet welds, recesses or hard-to-reach areas. These tools deliver a consistent finish on a wide variety of materials.

STAINLESS STEEL (INOX) | TITANIUM | CHROM NICKEL-BASED ALLOYS

BENCH GRINDER





UK

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
150	6	25.4	8A-Medium EX	348 712	6,000	8
			8S-Fine EX	348 715	7,500	
			9A-Coarse EX	348 713		
200	25		2S-Fine EX	347 394	5,000	2

CONVOLUTE
WHEELS
DEBURRING

Designed for general deburring, blending of parting lines, and repairing brushed surfaces on a wide variety of ferrous and non-ferrous materials. Available in various compositions for more or less aggressive performance.

STAINLESS STEEL (INOX) | TITANIUM | CHROM NICKEL-BASED ALLOYS

BENCH GRINDER





CK


DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
150	12.5	25.4	7S-Fine	348 000	6,000	4
			9S-Fine	348 003		
	25	25.4	7S-Fine	348 010		
			8A-Medium	348 016		
			8S-Fine	348 011		
			9A-Medium	348 014		
			9S-Fine	348 013		
200	25	75	7S-Fine	348 060	4,500	3
			8A-Medium	348 066		
			8S-Fine	348 061		
			9A-Medium	348 064		
			9S-Fine	348 063		

HEAVY DUTY CONVOLUTE WHEEL FOR DEBURRING

Manufactured with a denser composition to ensure a longer product life and a more aggressive cutting speed compared to our standard version. Durable and well suited for applications such as removing heavier burrs or deburring edges.

STEEL | STAINLESS STEEL (INOX)

BENCH GRINDER

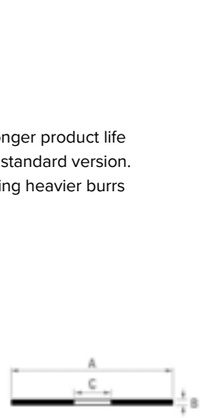



CK

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
150	12.5	25.4	9S-Fine HD	348 005	6,000	4
	25		8A-Medium HD	348 413		3
			9S-Fine HD	348 015		
200		75		348 055	4,500	

PRE-POLISHING CONVOLUTE WHEEL

Specially formulated with very fine grit and silicon carbide abrasives for ultra-light finishing applications. Removes minor scratches and produces a glossy surface on stainless steel, chrome and brass. Ideal for preparing surfaces before polishing with G-WENDT felt products!

STAINLESS STEEL (INOX) | CHROME | BRASS

BENCH GRINDER





CK


DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
150	12.5	25.4	6S-Very Fine PP	348 536	4,700	4
	25			348 537		3

METAL FINISHING CONVOLUTE WHEEL

Aluminium oxide specification for producing a satin finish on a wide variety of ferrous and non-ferrous metals.

STEEL | STAINLESS STEEL (INOX)

BENCH GRINDER





CK

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
150	25	25.4	5A-Medium	348 553	6,000	3
			6A-Medium	348 554		
	50			348 559		2


CLEAN AND FINISHING CONVOLUTE WHEEL

Open structure with silicon carbide abrasives for general cleaning tasks. Removes oxidation, discolouration, paint and light tool marks.

STEEL | STAINLESS STEEL (INOX)

BENCH GRINDER



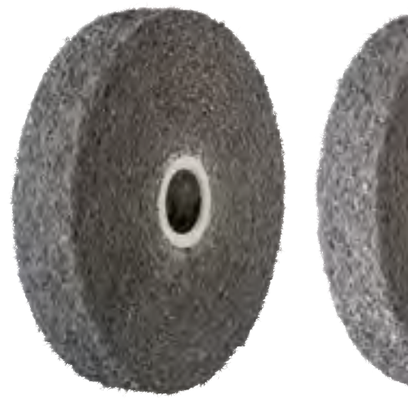

CK

DIMENSIONS (MM)			GRIT	ARTICLE NUMBER	RPM MAX.	
Ø A	B	Ø C				
150	25	25.4	S-Medium	348 482	3,000	3 per carton
			S-Fine	348 483		
	50		S-Medium	348 484		2
200	25	75		348 490	2,500	3

FINISHING ROLLS

PU FINISHING ROLLS

Thanks to their bonding and structure, our PU roll tools ensure both gentle and cool grinding. They are frequently used for texturing large surfaces, but also for preparing workpieces for polishing.

Due to their increased flexibility, the rolls adapt easily to contours and can even be profiled at low rotation speeds.

The blue version is ideal for aluminium, while the grey version is suitable for steel and stainless steel (INOX).

STAINLESS STEEL (INOX) | STEEL | ALUMINIUM

SATIN FINISHING MACHINE



PUW

DIMENSIONS (MM)			SPECIFICATION	ARTICLE NUMBER	RPM OPT.	RPM MAX.	
Ø A	B	Ø C					
100	100	19	Blue	323 560	1,950	5,000	1
			Grey	323 563			



CONTENTS

6.1	FELT FLAP DISCS	**95**
6.2	FELT FLAP WHEELS I CARTRIDGE ROLLS I POLISHING POINTS	**101**
6.3	FELT UNMOUNTED FLAP WHEELS	**105**
6.4	FELT FLAP ROLLS	**107**









MATERIALS THAT CAN BE PROCESSED
Stainless steel (INOX) I Steel I Non-ferrous metals

APPLICATIONS
Polishing of various materials and surface geometries – up to high-gloss finishing.

ADVANTAGES
- High flexibility ensures ideal contour adaptation
- Versatile applications thanks to a wide range of versions
- The airflow generated by the design reduces thermal stress on the workpiece

G-WENDT

FELT | POLISHING

Our felt polishing range offers tools made from high-quality wool felt, available in a wide variety of shapes and versions. These products are suitable for use with conventional polishing compounds and can be applied to a wide range of materials. This means you're only a few steps away from achieving a perfect metal surface.



6.1

FELT FLAP DISCS

FELT FLAP DISCS


This tool features upright wool felt flaps on a fibreglass backing. This allows for quick disc mounting and ensures a steady airflow, significantly reducing heat exposure on the workpiece.

They are especially used for high-gloss polishing of medium and large components.

STEEL | STAINLESS STEEL (INOX)
ALUMINIUM | COPPER | BRASS


ANGLE POLISHER


Always use in combination with a polishing compound!

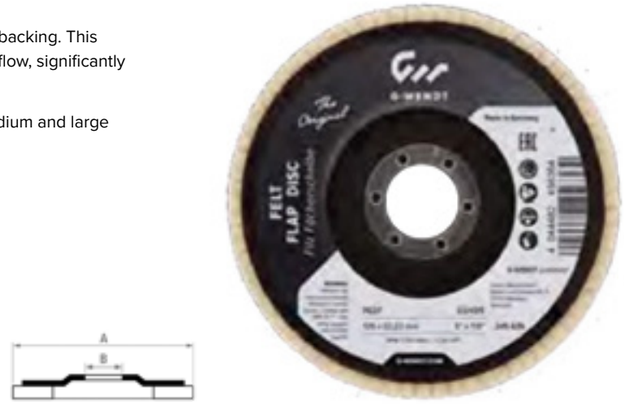


FG27 (FLAT)

DIMENSIONS (MM)		STANDARD FLEXIBILITY		EXTRA FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A	Ø B	Soft D5 | H25	Medium D5 | H40	Soft D3 | H25	Medium D3 | H40			
100	16	245 601	245 602	245 606	245 607	1,900	9,700	2
115	22.23	245 611	245 612	245 616	245 617	1,650	8,500	
	M14	249 911	249 912	249 916	249 917			
125	22.23	245 631	245 632	245 636	245 637	1,520	7,700	
	M14	249 921	249 922	249 926	249 927			
178	22.23	245 661	245 662	–	–	1,100	5,500	5
	M14	249 941	–	–	–			

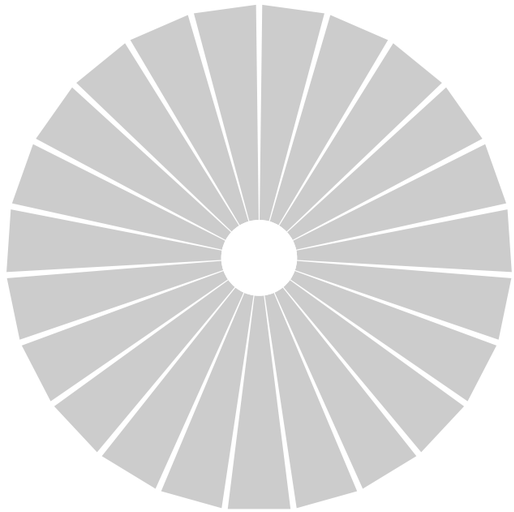



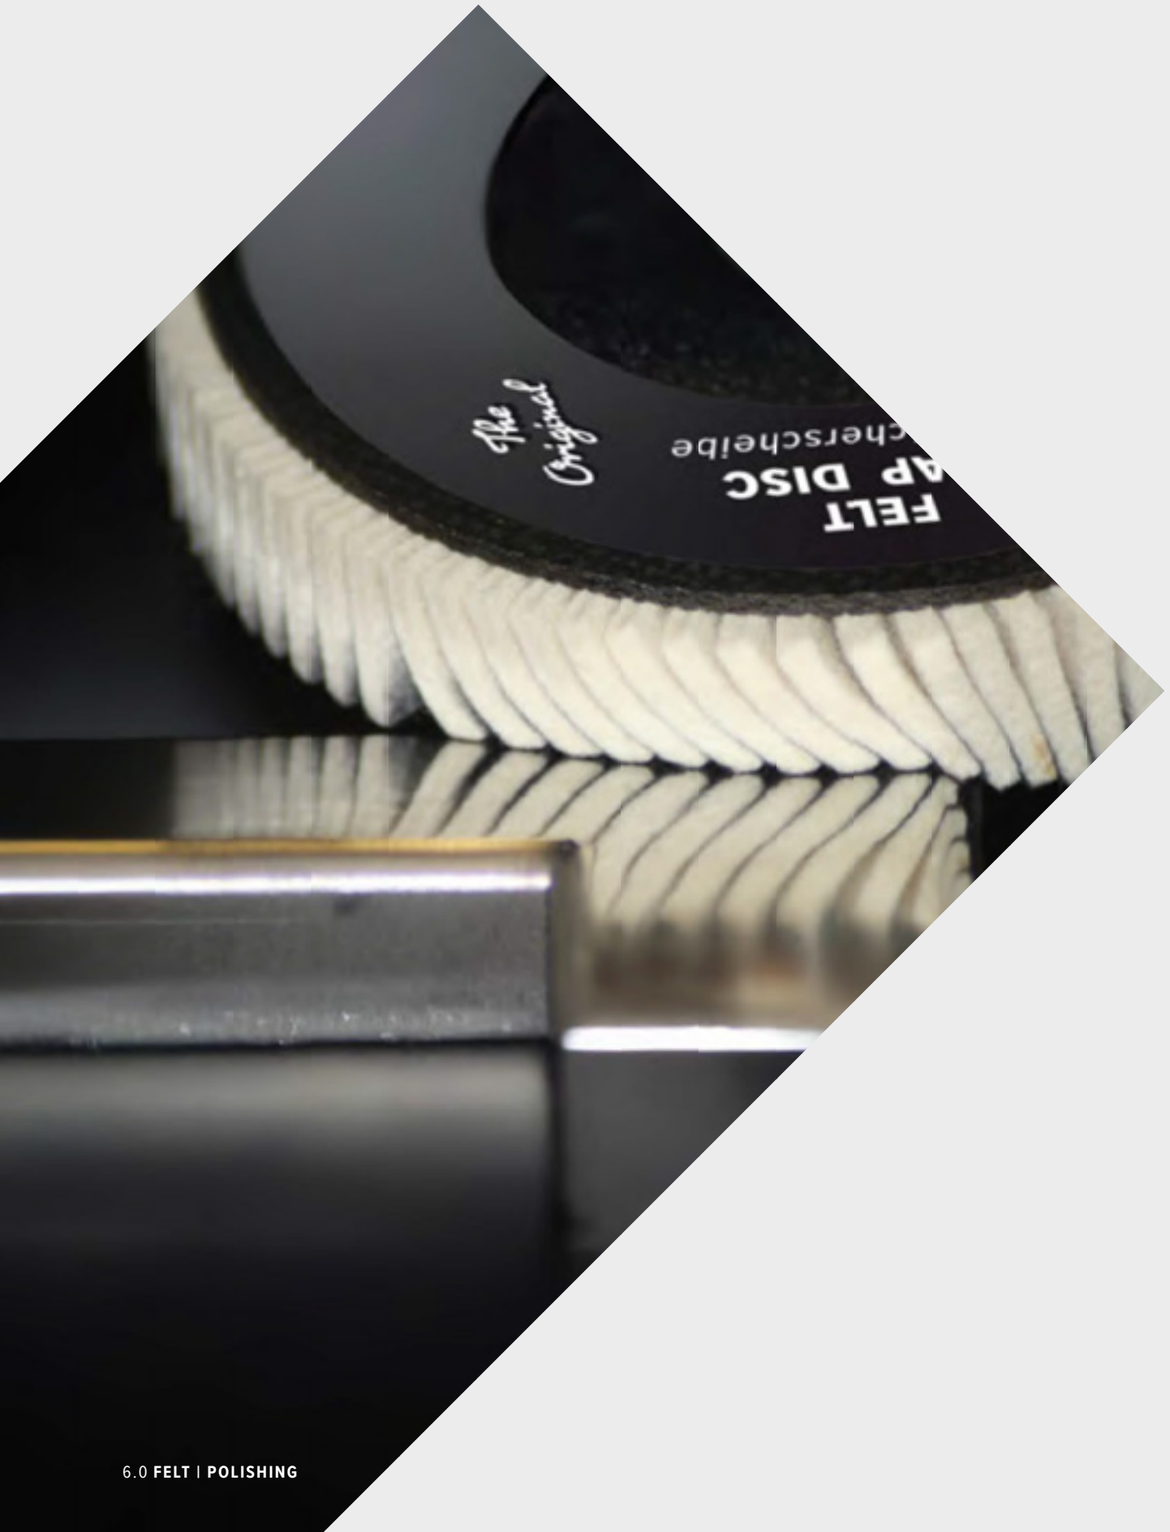

FELT FLAP DISCS
WITH REDUCED BACKING

Thanks to the flap overhang, this version is ideal for polishing into corners and angles. Additionally, it provides greater flexibility.

STEEL | STAINLESS STEEL (INOX)
ALUMINIUM | COPPER | BRASS

ANGLE POLISHER



FG27 (FLAT)

DIMENSIONS (MM)		STANDARD FLEXIBILITY		EXTRA FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A	Ø B	Soft D5 | H25	Medium D5 | H40	Soft D3 | H25	Medium D3 | H40			
125	22.23	245 630	245 633	245 635	245 638	1,520	7,700	2
	M14	–	249 923	249 925	–			

FELT FLAP DISCS
WITH LAYERED FLAPS

Compared to the standard version, this design allows for higher contact pressure, resulting in quicker results.

STEEL | STAINLESS STEEL (INOX)
ALUMINIUM | COPPER | BRASS

ANGLE POLISHER



FG29

DIMENSIONS (MM)		STANDARD FLEXIBILITY	RPM OPT.	RPM MAX.	
Ø A	Ø B	Soft D5 | H25			
115	22.23	246 631	1,650	8,500	5
125		246 611	1,520	7,700	

FELT FLAP DISCS COMBINED WITH ABRASIVE CLOTH

This combined felt flap disc is one of our latest innovations. It combines two steps into one – removal of minor surface defects and finishing – for use on flat, even surfaces.

Advantages:
- Made from premium wool felt combined with high-quality abrasive cloth
- Time savings compared to conventional polishing discs

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

ANGLE POLISHER



FGK27

DIMENSIONS (MM)		ARTICLE NUMBER	RPM OPT.	RPM MAX.	
Ø A	Ø B				
115	22.23	247 115	1,650	8,500	2
125		247 125	1,520	7,700	

FELT FLAP DISCS COMBINED WITH NONWOVEN ABRASIVE

This disc combines two steps in one – fine finishing and polishing. It is suitable for flat and curved surfaces as well as pipes.

Advantages:
- Made from premium wool felt combined with high-quality non-woven abrasive
- Time savings compared to conventional polishing discs
- Greater flexibility for processing irregular or contoured surfaces

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

ANGLE POLISHER



FGK27

DIMENSIONS (MM)		ARTICLE NUMBER	RPM OPT.	RPM MAX.	
Ø A	Ø B				
115	22.23	246 115	1,650	8,500	2
125		246 125	1,520	7,700	

FELT MINI FLAP DISCS

Small diameters ideal for use in tight areas or for mould and tank construction. Available with internal or external thread for quick disc changes.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

VARIABLE SPEED MINI ANGLE GRINDER

VARIABLE SPEED STRAIGHT GRINDER

R-TYPE

INTERNAL THREAD



FK (FLAT)

DIMENSIONS (MM)	FASTENER	STANDARD FLEXIBILITY		EXTRA FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A		Soft D3 | H25	Medium D3 | H40	Soft D2 | H25	Medium D2 | H40			
50	Internal thread	245 681	245 682	245 686	245 687	3,800	19,100	10
75		245 691	245 692	245 696	245 697	2,500	12,700	
50	R-Type	245 680	245 683	245 685	245 688	3,800	19,100	
75		245 690	245 693	245 695	245 698	2,500	12,700	



Felt polishing discs for quick-change system available upon request!

› ACCESSORIES



SHANK FOR MINI FELT FLAP DISCS WITH INTERNAL THREAD

DIMENSIONS (MM)		ARTICLE NUMBER	
Ø A	B		
6	40	230 998	1



QUICK-CHANGE HOLDER

DIMENSIONS (MM)		FASTENER	ARTICLE NUMBER	
Ø A	Ø B			
50	6	R-Type	263 170	1
75			263 180	
	M14		263 185	



FELT FLAP WHEELS

The flexible flaps of these shaft tools adapt to contours and enable cooler airflow. Their size covers a broad range of applications, such as working on complex components or hard-to-reach areas.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

VARIABLE SPEED STRAIGHT GRINDER





FF

DIMENSIONS (MM)			STANDARD FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A	B	Ø C	Soft D2 | H25	Medium D2 | H40			
20	10	3	188 111	188 112	9,500	11,000	10
	20		188 121	188 122			
	10	6	187 611	187 612			
	20		187 621	187 622			
25	10	3	188 141	188 142	7,600	10,700	
	20		188 151	188 152			
	30		188 161	188 162			
	10	6	187 641	187 642			
	20		187 651	187 652			
	30		187 661	187 662			
30	10	3	188 181	188 182	6,300	10,500	
	20		188 191	188 192			
	10	6	187 681	187 682			
	20		187 691	187 692			

DIMENSIONS (MM)			STANDARD FLEXIBILITY		EXTRA FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A	B	Ø C	Soft D3 | H25	Medium D3 | H40	Soft D2 | H25	Medium D2 | H40			
40	20	6	187 731	187 732	187 736	187 737	4,750	9,000	10
	30		187 741	187 742	187 746	187 747			
50	20		187 791	187 792	187 796	187 797	3,800	8,000	
	30		187 801	187 802	187 806	187 807			
	40		187 811	187 812	187 816	187 817			
60	30		187 851	187 852	187 856	187 857	3,150	7,000	
	40		187 861	187 862	187 866	187 867			

DIMENSIONS (MM)			STANDARD FLEXIBILITY		EXTRA FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A	B	Ø C	Soft D5 | H25	Medium D5 | H40	Soft D3 | H25	Medium D3 | H40			
80	50	6	187 951	187 952	187 956	187 957	2,400	6,000	10



Felt flap wheels in brush version available upon request.

FELT CARTRIDGE ROLLS CYLINDRICAL

For polishing corners and grooves.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

VARIABLE SPEED STRAIGHT GRINDER





FR

DIMENSIONS (MM)			SPECIFICATION	RPM MAX.	
Ø A	B	Ø C	Medium		
8	25	3.2	159 651	10,000	10
13			159 661	8,000	
	38		159 671		

FELT CARTRIDGE ROLLS FULL TAPER

Especially suitable for use in corners and grooves.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

VARIABLE SPEED STRAIGHT GRINDER





FRK

DIMENSIONS (MM)			SPECIFICATION	RPM MAX.	
Ø A	B	Ø C	Medium		
13	25	3.2	160 801	8,000	10

› ACCESSORIES

THREADED MANDREL FOR FELT CARTRIDGE ROLLS

Matching threaded mandrel for felt cartridge rolls.



DIMENSIONS (MM)			DIAMETER (MM)	ARTICLE NUMBER	
Ø A	B	Ø C			
8	25	3.2	6	161 921	1
13					
	38		3	161 913	

FELT POLISHING POINTS

Used in combination with polishing paste, these tools allow polishing in nearly any location, even on complex shapes. The robust design made of highly compressed felt and a steel shaft ensures long service life and added safety.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

VARIABLE SPEED STRAIGHT GRINDER





FPZY

DIMENSIONS (MM)			SPECIFICATION	RPM OPT.	RPM MAX.	
Ø A	B	Ø C	Medium			
6	10	3	189 703	16,000	32,000	10
8			189 723	12,000	24,000	
10	14	6	189 743	10,000	20,000	
15	20		189 763	6,000	12,000	
20	25		189 783	5,000	10,000	
25	30		189 793	4,000	8,000	





6.3


FELT UNMOUNTED FLAP WHEELS

FELT THREADED FLAP WHEELS
M14

The flexible flaps adapt to contours and allow a cooler airflow. This version is suitable for use on a variable-speed handheld machine such as an angle polisher.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

ANGLE POLISHER









FLS M14


DIMENSIONS (MM)			STANDARD FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A	B	Ø C	Soft D5 | H25	Medium D5 | H40			
115	20	M14	346 040	346 041	1,650	8,500	2
125			346 042	346 043	1,520	7,700	

FELT UNMOUNTED FLAP WHEEL

The flexible flaps adapt to contours and allow a cooler airflow. This version is suitable for use on a standard bench grinder.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

BENCH GRINDER







FLS

DIMENSIONS (MM)			STANDARD FLEXIBILITY		RPM OPT.	RPM MAX.	
Ø A	B	Ø C	Soft D5 | H25	Medium D5 | H40			
100	25	25.4	346 461	346 462	1,900	3,700	1
	30		346 021	346 022			
150	25		346 051	346 052	1,250	3,200	
	50		346 111	346 112			
200	25		346 301	346 302	950	2,400	
	50		346 361	346 362			
	100		346 401	346 402			

FELT POLISHING DISCS

The flexible flaps adapt to contours and allow a cooler airflow. This version is suitable for bench grinders.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

BENCH GRINDER



FPS

DIMENSIONS (MM)			SPECIFICATION		RPM OPT.	RPM MAX.	
Ø A	B	Ø C	H60	H68			
150	25	10	346 969	–	1,300	3,800	
160	6	25	–	346 959	1,100	3,500	1
200	25	10	346 989	–	1,000	3,000	

6.4


FELT FLAP ROLLS

FELT FLAP ROLLS

Optimised for polishing large surfaces using variable-speed machines.

STEEL | STAINLESS STEEL (INOX) | ALUMINIUM | COPPER | BRASS

SATIN FINISHING MACHINE





FW

DIMENSIONS (MM)			STANDARD FLEXIBILITY		EXTRA FLEXIBILITY	RPM OPT.	RPM MAX.	
Ø A	B	Ø C	Soft D5 | H25	Medium D5 | H40	Soft D3 | H25			
100	50	19	323 801	323 802	323 806	1,900	3,700	2
	100		323 821	323 822	323 826			1
		M14	323 881	323 882	323 885			
110		19	323 930	323 931	323 932			

G-WENDT POWER TOOLS

G-WENDT machines stand for powerful solutions in professional applications in trade and industry. They are designed to complement our tool range and support efficient work on different materials and in various applications. Robust components, well-designed ergonomics and practical features ensure reliability, control and a high level of user comfort in daily use.

G-WENDT ANGLE GRINDER OBSIDRA

The OBSIDRA is a powerful 125 mm angle grinder for demanding grinding, cutting and finishing work in trade and industry. The brushless motor, variable speed control and robust machine concept enable efficient work on different materials and with various G-WENDT tools. Well-designed safety functions, an ergonomic soft grip and a 4 m power cable provide control, comfort and freedom of movement in daily use.

PRODUCT FEATURES

SPEED CONTROL
2,800-10,000 rpm for material-specific work.

BRUSHLESS MOTOR
Efficient drive for high performance, long service life and reduced maintenance.

RESTART PROTECTION & SOFT START
For increased safety during operation and smooth start-up.

DUST PROTECTION
Removable dust protection supports long motor life and reduces the ingress of particles.

ERGONOMIC SOFT GRIP
Secure hold and comfortable guidance, even during longer applications.

STATUS INDICATOR
Overload warning function to protect the machine and operator.


HANDLING & FREEDOM OF MOVEMENT
2.04 kg weight and 4 m power cable for good control and greater freedom of movement.



POWERFUL
1500 W maximum power input.



VERSATILE
Ideal for grinding, cutting and finishing.

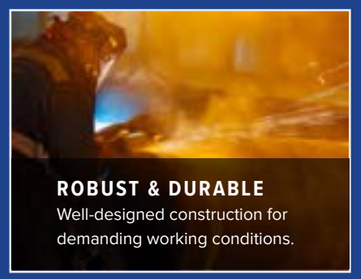

ROBUST & DURABLE
Well-designed construction for demanding working conditions.

FEATURES IN DETAIL



RESTART PROTECTION & SOFT START
Prevents unintentional restart after power interruption and ensures smooth start-up.



ERGONOMIC SOFT GRIP
Secure hold and comfort-able guidance, even during longer applications.





SPEED CONTROL
Variable speed adjustable in several steps.
2,800-10,000 rpm

DUST PROTECTION
Removable dust protection supports long motor life and reduces the ingress of particles.

STATUS INDICATOR
Overload warning function to protect the machine and operator.

TECHNICAL DATA

OBSIDRA 1500S-BL						
MOUNTING	VOLTAGE	POWER INPUT (MAX.)	SPEED NO-LOAD	WEIGHT	ARTICLE NUMBER	
M14	230 V	1500 W	2,800 – 10,000 rpm	2.04 kg	999 801	1
5/8-11	120 V	1500 W	2,800 – 10,000 rpm	2.04 kg	999 802	1

SCOPE OF DELIVERY

- OBSIDRA 1500S-BL angle grinder
- Protective guard
- Side handle
- Clamping flange
- Clamping nut
- Operating instructions






OPTIMIZED FOR G-WENDT TOOLS

Matched to G-WENDT cutting, grinding, flap and finishing tools – for efficient work, clean results and long tool life.



CONTENTS

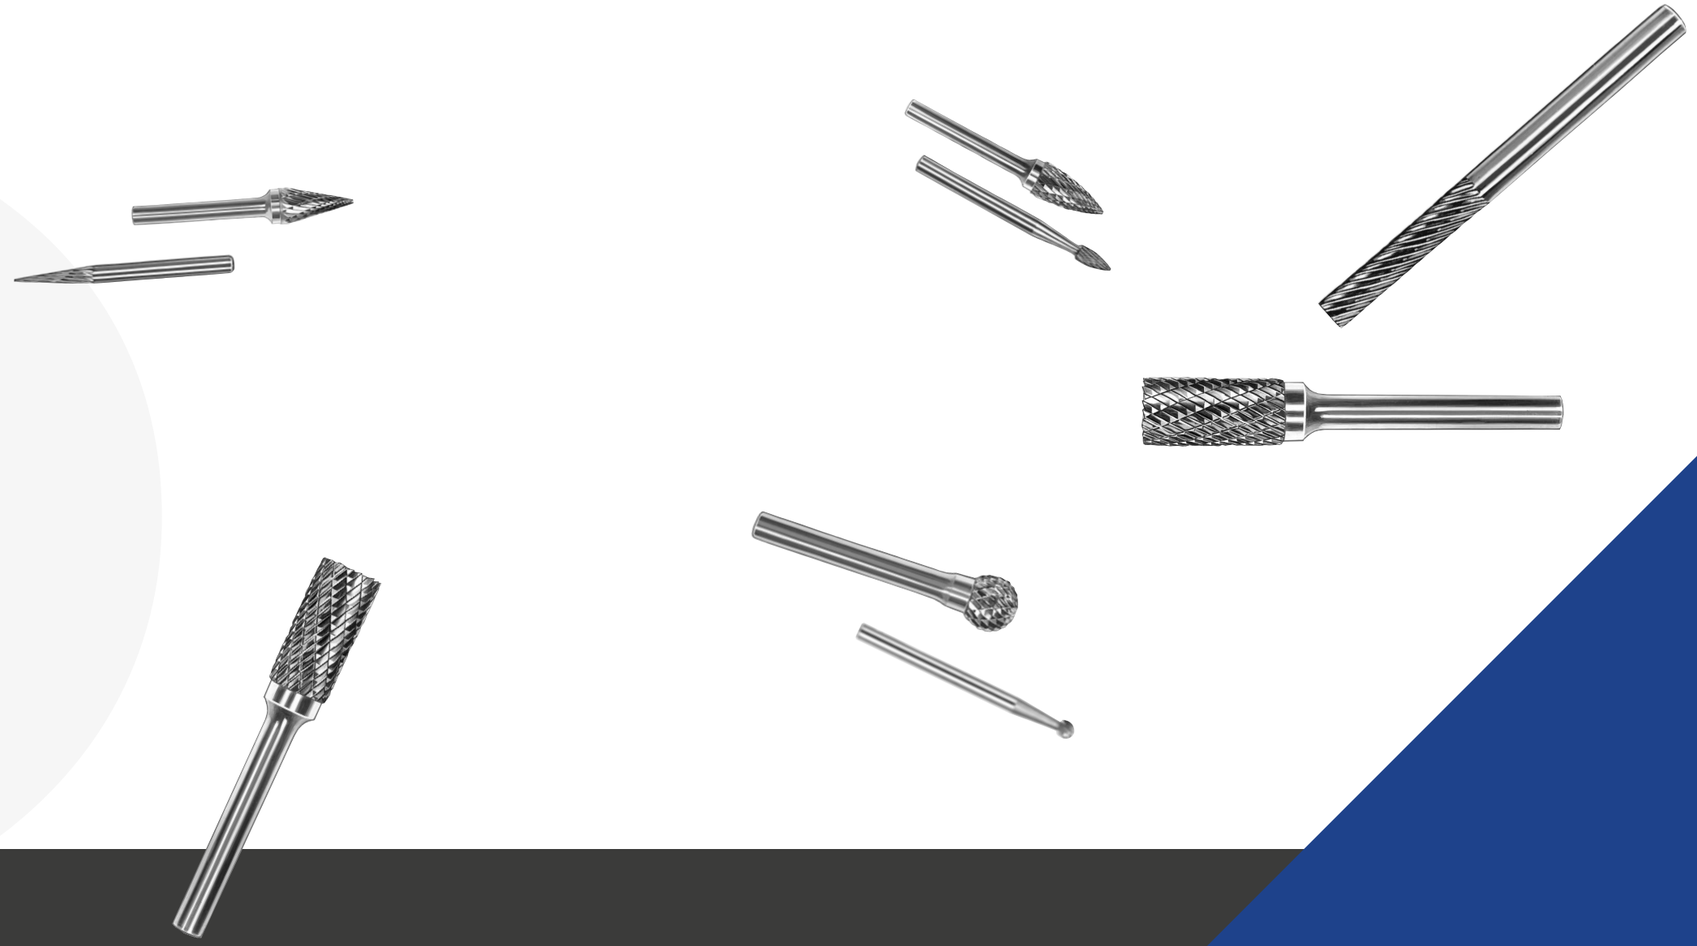

MATERIALS THAT CAN BE PROCESSED

Stainless Steel (INOX) | Steel | Aluminium | Cast Iron | Non-magnetic Metals | Carbon Fibre Composites | Plastics | Fibreglass

APPLICATIONS

Deburring | Weld Seam Processing | Milling | Material Removal

ADVANTAGES

- Highest quality
- Precisely manufactured and balanced
- Excellent user-friendliness

G-WENDT

SOLID CARBIDE BURRS

From universal use in fine and coarse machining to high-performance applications, this segment offers a well-balanced range of durable carbide burrs. Choose from a variety of cuts, shapes, sizes, and special designs – it's your choice.

SOLID CARBIDE BURRS

CROSS CUT

The cross cut produces smaller chips, improves user control and ensures an excellent surface finish.

DIVERSE **STRAIGHT GRINDER**

Available upon request: 150 mm long shank
INOX CUT | Aluminium Cut | Titanium Cut





SHAPE	DIMENSIONS (MM)			TYPE	ARTICLE NUMBER	
	Ø A	B	Ø C			
Cylinder ZYA I SA	6	16	6	SA-1M	965 500	1
	9.5	19		SA-3M	965 509	
	12.7	25		SA-5M	965 515	
	3	14	3	SA-43M	965 524	
Cylindrical Tool with Face Serration ZYA-S I SB	9.5	19	6	SB-3M	965 559	
Radius End Cylinder WRC I SC	6	16	6	SC-1M	965 590	
	9.5	19		SC-3M	965 599	
	12.7	25		SC-5M	965 605	
	3	14	3	SC-42M	965 617	
Ball KUD I SD	6	5	6	SD-1M	965 640	
	9.5	8		SD-3M	965 649	
	12.7	11		SD-5M	965 658	
	3	2.5	3	SD-42M	965 667	
Oval TRE I SE	6	9.5	6	SE-1M	965 690	
	9.5	16		SE-3M	965 696	
	12.7	22		SE-5M	965 702	
	3	5.5	3	SE-41M	965 711	
Radius End Tree RBF I SF	6	16	6	SF-1M	965 740	
	9.5	19		SF-3M	965 746	
	12.7	25		SF-5M	965 752	
	3	12.7	3	SF-42M	965 758	
Pointed Tree SPG I SG	6	16	6	SG-1M	965 780	
	9.5	19		SG-3M	965 786	
	12.7	25		SG-5M	965 792	
	3	12.7	3	SG-44M	965 804	
Radius End Taper KEL I SL	6	16	6	SL-1M	965 860	
	9.5	27		SL-3M	965 869	
	12.7	28		SL-4M	965 875	
	3	12.7	3	SL-42M	965 883	
Cone SKM I SM	6	12.7	6	SM-1M	965 900	
	9.5	16		SM-4M	965 906	
	12.7	22		SM-5M	965 909	
	3	11	3	SM-42M	965 912	



CONTENTS







MATERIALS THAT CAN BE PROCESSED
Steel | Stainless Steel (INOX) | Aluminium | Copper | Brass | Many more

APPLICATIONS
From aggressive material removal to matting and structuring – all the way to mirror polishing.

ADVANTAGES
Would you like to get to know our products better? Then you're in exactly the right place!

G-WENDT

SETS & ACCESSORIES

This section features a wide range of product sets for working on countless surfaces – including metals, non-ferrous metals, and many other materials. Each set is designed for practical use, perfectly coordinated, and easy to integrate into your daily workflow.

3-STEP FINISHING SET
Ø 115: **999 959**
Ø 125: **999 956**

Three steps to a flawless finish. This set is the perfect combination for transforming stainless steel surfaces into a mirror-like shine. From blending weld seams and removing scratches to polishing the surface to perfection.

DIVERSE

ANGLE GRINDER **ANGLE POLISHER**



CONTENTS OF THE SET

STEP	PRODUCT	SPECIFICATION	POSSIBILITIES	ARTICLE NUMBER Ø 115	ARTICLE NUMBER Ø 125	
1	HYBRID Flap Disc	Medium I Reddish Brown	Weld Seam Blending	245 173	245 183	each 1
2	UNITIZED Finishing Disc	4S-Very Fine	Light Scratch Removal	245 819	245 839	
3	Felt Flap Disc	Soft D5 I H25	Surface Polishing	245 611	245 631	
	Polishing Compound	WENDT WHITE		999 025	999 025	

FLAP DISCS SET **POWERFLEX**
Ø 115: **999 943**
Ø 125: **999 944**

Aggressive material removal to fine finishing – these flap discs demonstrate their strengths on various workpieces and in every situation.

Advantages:
- Excellent service life
- High stock removal performance
- Comfortable operation with low vibration
- Made exclusively from high-quality materials

DIVERSE **ANGLE GRINDER**



CONTENTS OF THE SET

PRODUCT	LINE	SPECIFICATION	ARTICLE NUMBER Ø 115	ARTICLE NUMBER Ø 125	
HiTec	KÖLN	Zirconia I X40	236 112	236 132	each 1
POWERFLEX Flap Disc		Ceramic I K40	229 412	229 432	
POWERFLEX Flap Disc	NEW YORK	Zirconia I X40	229 112	229 132	
POWERFLEX Flap Disc	RIO	Zirconia I E40	229 712	229 732	



FINISHING AND POLISHING SET ON 3MM SHANK
999 946

This set is ideal for coarse grinding, matt finishing, texturing or high-gloss polishing of hard-to-reach areas.

It offers a well-balanced selection of shank tools that no work-shop should be without – including polishing compound.

DIVERSE

STRAIGHT GRINDER



CONTENTS OF THE SET

PRODUKT	TYPE	ABMESSUNG (MM)	SPECIFICATION	ARTICLE NUMBER	
Mini Flap Wheel	WM	10 x 10 x 3	A120	103 007	each 1
		20 x 10 x 3	A80	103 225	
		20 x 10 x 3	A120	103 227	
Nonwoven Flap Wheel	WV	20 x 20 x 3	Very Fine	107 023	
Interleaved Flap Wheel	WVK	20 x 20 x 3	Fine I A150	192 504	
Felt Flap Wheel	FF	20 x 10 x 3	D2H40	188 112	
		20 x 20 x 3		188 122	
Polishing Compound	–	–	WENDT WHITE	–	



GRINDING AND POLISHING SET ON 6MM SHANK
999 957

This extensive product set offers a wide variety of our shank and specialty tools. From coarse grinding to high-gloss polishing. Including the corresponding polishing compounds.

DIVERSE

STRAIGHT GRINDER



CONTENTS OF THE SET

PRODUKT	TYPE	ABMESSUNG (MM)	SPECIFICATION	ARTICLE NUMBER	
Flap Band	LH	30 x 20	R060	151 124	each 1
Expanding Drum	E	30 x 20 x 6	–	150 953	
Flap Wheel	WF	40 x 20 x 6	A120	100 807	
Interleaved Flap Wheel	WVK	40 x 20 x 6	Medium I A80	190 561	
Nonwoven Flap Wheel	WV	40 x 20 x 6	Medium	106 141	
		40 x 20 x 6	Very Fine	106 143	
		40 x 20 x 6	Super Fine	106 144	
UNITIZED Finishing Wheel	US	40 x 12 x 6	4S-Very Fine	106 807	
Felt Flap Wheel	FF	40 x 20 x 6	D2H25	187 736	
Polishing Compound	–	–	WENDT RED	999 024	
	–	–	WENDT WHITE	999 025	

FLAP BAND SET
999 977

Flap bands were originally developed by us as a supplement and alternative to the classic flap wheel. They offer consistent and aggressive material removal, while also being extremely robust and durable.

The expanding drum included in the set ensures a secure fit at all times, as well as quick and easy tool changes.

STEEL | STAINLESS STEEL (INOX)


STRAIGHT GRINDER

Always ensure the correct direction of rotation.



CONTENTS OF THE SET

PRODUKT	ABMESSUNG (MM)	MATERIAL	SPECIFICATION	ARTICLE NUMBER	
Flap Bands	30 x 30	Ceramic	K40	152 162	each 1
			K60	152 164	
			K80	152 165	
		Zirconia	R40	151 162	
			R60	151 164	
			R80	151 165	
Expanding Drum	30 x 30 x 6	–	–	150 955	

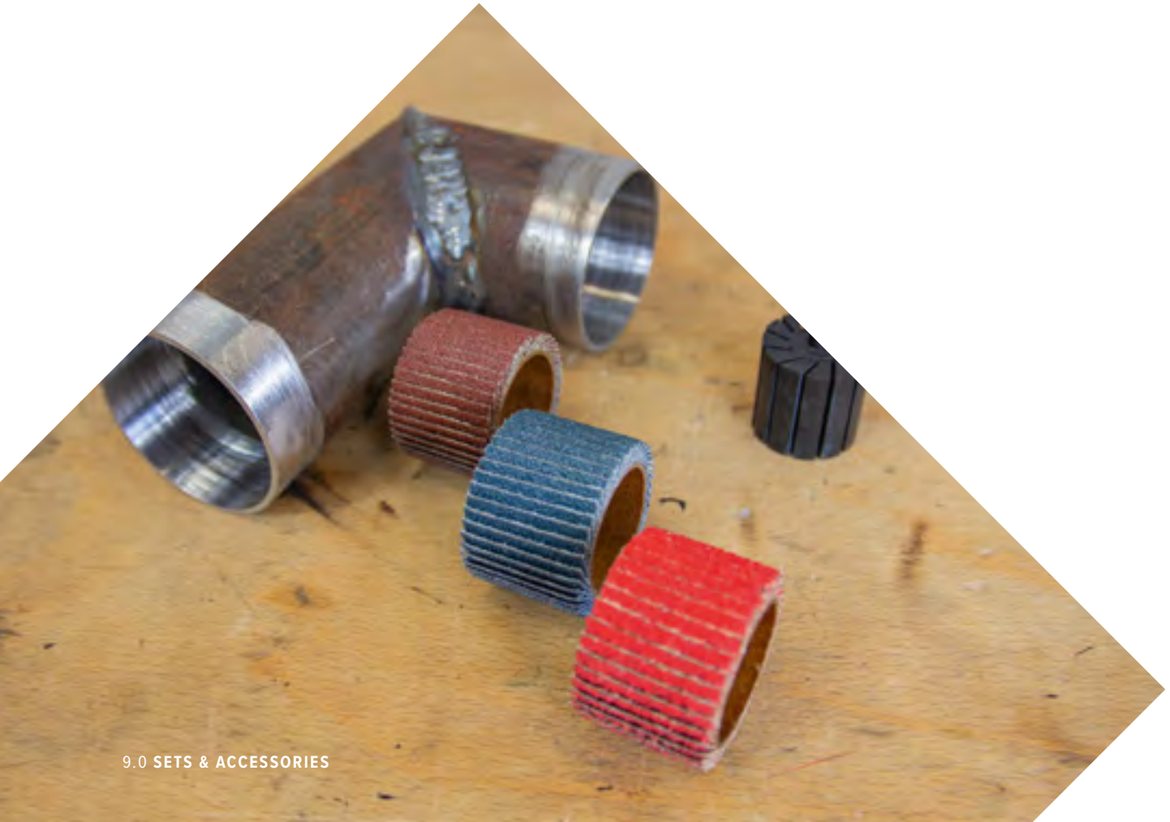

FELT FLAP WHEEL KIT
ON 6MM SHANK
999 958

Experience for yourself how this extensive set can help improve your polishing process. It includes dimensions for both targeted applications and surface treatment. The perfect mix for restoration projects.

STEEL | STAINLESS STEEL (INOX
ALUMINIUM | COPPER | BRASS

VARIABLE STRAIGHT GRINDER



CONTENTS OF THE SET

PRODUKT	TYPE	ABMESSUNG (MM)	SPECIFICATION	ARTICLE NUMBER	
Felt Flap Wheel	FF	20 x 20 x 6	D2H25	187 621	each 1
		40 x 30 x 6	D3H25	187 741	
		40 x 30 x 6	D3H40	187 742	
Felt Cartridge Roll, cylindrical	FR	13 x 25 x 3.2	Medium	159 661	
Felt Cartridge Roll, tapered	FRK	13 x 25 x 3.2		160 801	
Mandrel for Cartridge Rolls	SRD	3.2 x 19 x 6	–	161 921	
Polishing Compound	–	–	WENDT WHITE	999 025	

G-WENDT SAMPLE CASE
999 955

Originally developed for our sales team, the sample case includes a generous selection of popular and highly specialised tools from our product range.

Distributors can use the sample case for sales presentations, allowing customers to experience the tools rather than relying on catalogues.





G-WENDT POLISHING COMPOUNDS


Our most popular polishing compounds – “Red” for pre-polishing and “White” for high-gloss polishing.

POLISHING COMPOUNDS

TYPE	ARTICLE NUMBER	
WENDT RED	999 024	1
WENDT WHITE	999 025	



LOCATIONS

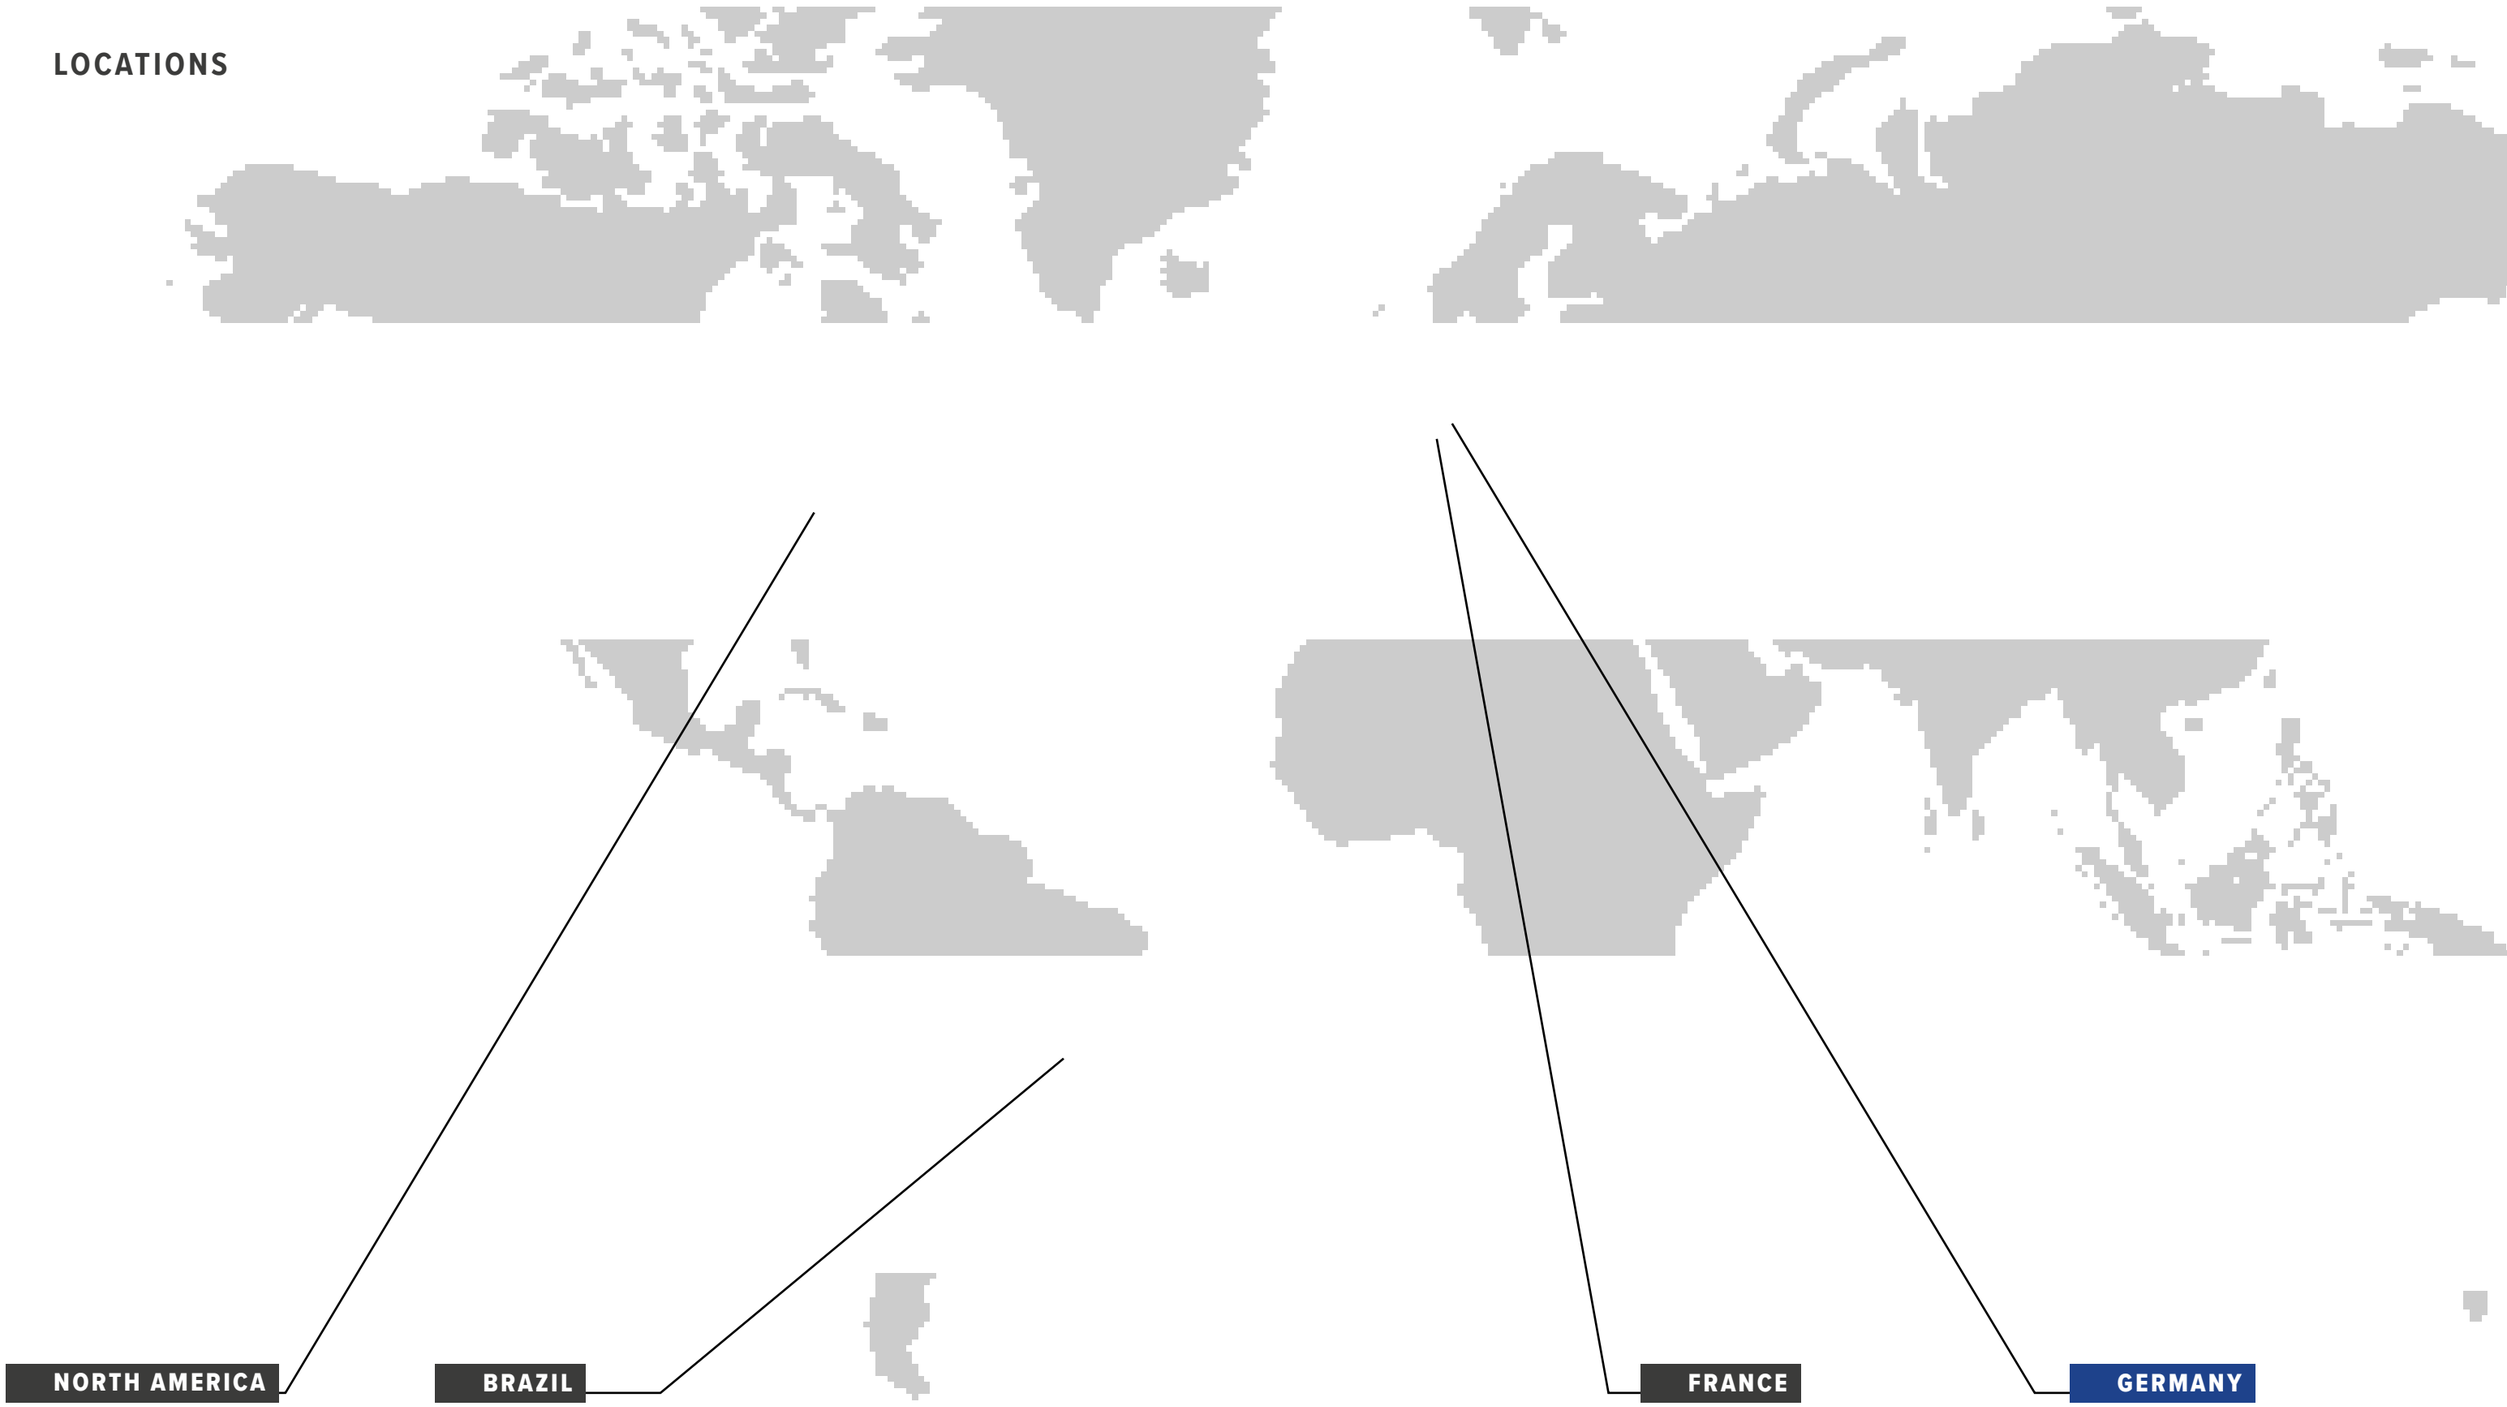

NORTH AMERICA

WENDT USA, LLC

1500 Clinton Street – Bldg. 7
Buffalo, NY 14206-3015

T: (+1) 716 972 0333
F: (+1) 716 972 0334
E: info@wendtusa.com

BRAZIL

W2 BRASIL

Ottilia Ferraz de Camargo 98
Bairro Campo Bonito
13349-042 Indaiatuba – SP

T: +55 (19) 2210-9108
E: marco@w2brasil.com.br
E: fabio@w2brasil.com.br

FRANCE

WENDT S.A.R.L

27 rue du Champ de Mars,
CS 60919
57209 Sarreguemines

T: (+33) 3 87 98 75 54
F: (+33) 3 87 98 27 27
E: info@wendt.fr

GERMANY

GÜNTER WENDT GMBH

Werner-von-Siemens Str. 5
51570 Windeck

T: +49 (0) 2292 / 9140-0
F: +49 (0) 2292 / 9140-40
E: info@g-wendt.com

ABRASIVES.
SPARKS.
SOLUTIONS.

G-WENDT.COM